



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

November 8, 2005

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Attn.: Ms. Diana Whitney

**RE: Asphalt Wash #10-23-23-33
NESW Sec 33 T10S-R23E
Uintah County, Utah**

Dear Ms. Whitney:

Enclosed is an original application to drill concerning the above-referenced proposed well. This information was also submitted to the Bureau of Land Management.

Enduring Resources, LLC is requesting the Utah Division of Oil, Gas and Mining to hold this application and all future information as confidential.

If any questions arise or additional information is required, please contact me at 303-350-5114.

Very truly yours,

Alvin R. (Al) Arlian
Landman-Regulatory Specialist

/ps
Enclosures:

RECEIVED

NOV 15 2005

UTAH DIVISION OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: UTU-07351	6. SURFACE: Federal
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: Enduring Resources, LLC				9. WELL NAME and NUMBER: Asphalt Wash 10-23-23-33	
3. ADDRESS OF OPERATOR: 475 17th St., Ste 1500 CITY Denver STATE CO ZIP 80220				PHONE NUMBER: (303) 350-5114	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1,990' FSL - 2,135' FWL 642505X 39.903641 AT PROPOSED PRODUCING ZONE: Same 44181834 -109.332965				10. FIELD AND POOL, OR WILDCAT: Undesignated Natural Butte 11. QTR/QTR. SECTION, TOWNSHIP, RANGE, MERIDIAN: NESW 33 10S 23E S	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 76.2 miles southeasterly from Vernal, UT				12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 1,990'		16. NUMBER OF ACRES IN LEASE: 600		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40 acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1,103'		19. PROPOSED DEPTH: 7,241		20. BOND DESCRIPTION: RLB0008031	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5340.5" GL ungraded		22. APPROXIMATE DATE WORK WILL START: 12/15/2005		23. ESTIMATED DURATION: 20 days	

24. PROPOSED CASING AND CEMENTING PROGRAM							
SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
20"	14"	line pipe		40	3 yards	Ready Mix	
11"	8-5/8"	J-55	24#	2,000	Premium Lead	136 sxs	3.50 11.1
					Premium Tail	138 sxs	1.15 15.8
7-7/8"	4-1/2"	N-80	11.6#	7,241	Class G	114 sxs	3.91 11.0
					50/50 Poz Class G	884 sxs	1.29 14.1

25. ATTACHMENTS	
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:	
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

CONFIDENTIAL

NAME (PLEASE PRINT) ALVIN R. (AL) ARLIAN TITLE Landman - Regulatory Specialist

SIGNATURE [Signature] DATE 10/17/2005

(This space for State use only)

API NUMBER ASSIGNED: 43-047-37378


Approved by the
Utah Division of
Oil, Gas and Mining

Date: 11-15-05
By: [Signature]

RECEIVED
NOV 15 2005

DIV. OF OIL, GAS & MINING

OF 10




SELF-CERTIFICATION STATEMENT

The following self-certification statement is provided per federal requirements dated June 15, 1988.

Please be advised that Enduring Resources, LLC is considered to be the operator of the following well.

Asphalt Wash #10-23-23-33
NESW 1990' FSL 2135' FWL
Section 33 T10S-R23E S.L.B. & M.
Lease Serial No.: UTU-073451
Uintah County, Utah

Enduring Resources, LLC is responsible under the terms and conditions of the lease for the operations conducted upon leased lands. Bond coverage is provided by UTB000173.



Alvin R. (Al) Arlian
Landman - Regulatory Specialist
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202
(303) 350-5114

RECEIVED

NOV 15 2005

DIV. OF OIL, GAS & MINING

Enduring Resources, LLC

Asphalt Wash 10-23-23-33
NESW Sec 33-T10S-R23E
Uintah County, Utah

Lease #: UTU-73451

ONSHORE ORDER 1 - DRILLING PLAN

1. Estimated Tops of Geological Markers:

Formation	Depth (K.B.)
Uinta	Surface
Green River	405'
Wasatch	3236'
Mesaverde	5108'

2. Estimated Depths of Anticipated Water, Oil, Gas or Other Minerals: (5,349' estimated KB)

Substance	Formation	Depth (K.B.)
	KB-Uinta Elevation: 5349'	
Oil / Gas	Green River	405'
Oil /Gas	Wasatch	3236'
Oil /Gas	Mesaverde	5108'
	Estimated TD	7241'

An 11" hole will be drilled to approximately 2000 feet. The depth will be determined by the depth that the Birds Nest zone is encountered. The hole will be drilled 400 feet beyond the top of the Birds Nest zone and surface casing will be set.

3. Pressure Control Equipment: (3000 psi schematic attached)

- A. Type: Eleven (11) inch double gate hydraulic BOP with eleven (11) inch annular preventer on 3,000 psi casinghead, with 3,000 psi choke manifold equipped per the attached diagram. BOPE as specified in *Onshore Oil & Gas Order Number 2*. A PVT, stroke counter and flow sensor will be installed to check for flow and monitor pit volume.
- B. Pressure Rating: 3,000 psi BOPE
- C. Kelly will be equipped with upper and lower Kelly valves.

D. Testing Procedure: Annular Preventer

At a minimum, the annular preventer will be pressure tested to 50% of the stack rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the annular preventer will be functionally operated at least weekly.

Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

E. Miscellaneous Information:

The blowout preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*.

Single Shot directional surveys will be dropped every 2000 feet. Maximum allowable angle is 5 degrees.

4. Proposed Casing & Cementing Program:**A. Casing Program: All New**

Hole Size	Casing Size	Wt./Ft.	Grade	Joint	Depth Set (md)
20"	14" O.D.				40'
11"	8-5/8"	24#	J-55	ST&C	0 – 2,000' est
7-7/8"	4-1/2"	11.6#	N-80	LT&C	0 – 7,241'

The surface casing will have guide shoe, 1 jt., insert float collar. Centralize the shoe joint with bowspring centralizers in the middle and top of the joint and the next 16 joints with bowspring centralizers on every other collar (8 centralizers total). Thread lock guide shoe.

Casing string(s) will be pressure tested to 0.22 psi/foot of casing string length or 1500 psi, whichever is greater (not to exceed 70% of the internal yield strength of the casing), after cementing and prior to drilling out from under the casing shoe.

B. Casing Design Parameters:

Depth (md)	Casing	Collapse(psi)/SF	Burst (psi)/SF	Tension(mlbs)/SF
40'	16"			
2000'	8-5/8", 24#/ft, J55, STC	1370/1.53(a)	2950/3.30(b)	244/5.85(c)
7,241'	4-1/2", 11.6#/ft, N-80, LTC	6350/1.69 (d)	7780/2.25 (e)	223/3.09 (f)

- (a.) based on full evacuation of pipe with 8.6 ppg fluid on annulus
- (b.) based on 8.6 ppg gradient with no fluid on annulus
- (c.) based on casing string weight in 8.6 ppg mud
- (d.) based on full evacuation of pipe with 10.0 ppg fluid on annulus
- (e.) based on 9.2 ppg gradient, gas to surface, with no fluid on annulus, no gas gradient
- (f.) based on casing string weight in 9.2 ppg mud

PROPOSED CEMENTING PROGRAM**Surface Casing (if well will circulate)-Cemented to surface**

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	1500	Premium cement + 16% gel + 0.25 pps celloflake	136	25%	11.1	3.50
8-5/8"	Tail	500	Premium cement + 2% CaC ₂ + 0.25 pps celloflake	138	25%	15.8	1.15

A cement top job is required if cement fallback is greater than 10' below ground level. Top job (weight 15.8 ppg, yield 1.15 ft³/sx) cement will be premium cement w/ 3% CaCl₂+0.25 pps celloflake. Volume as required

Surface Casing (if well will not circulate) - Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	500	Premium cement + 2% CaCl ₂ + 0.25 pps celloflake	138	25	15.8	1.15
8-5/8"	Top job	As req.	Premium cement + 3% CaCl ₂ + 0.25 pps celloflake	As Req.		15.8	1.15

Production Casing and Liner - Cemented TD to 300' above base of surface casing

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
4-1/2"	Lead	1536	Class "G" + 5% NaCl + 12% Gel + 0.25 pps celloflake + 0.2% antifoam + 0.25% fluid loss + 1% extender	114	25	11.0	3.91
4-1/2"	Tail	4005	50/50 POZ Class G + 2% gel + 1% CaCl ₂ + 0.2% dispersant + 0.2% fluid loss + 0.1% antifoam	884	25	14.1	1.29

Cement volumes for the 4-1/2" Production Casing will be calculated to provide a top of cement to 300' above base of surface casing. Cement volumes are approximate and were calculated under the assumption that a gauge hole will be achieved. Actual cement volumes may vary due to variations in the actual hole size and will be determined by running a caliper log on the drilled hole. Actual cement types may vary due to hole conditions and cement contractor used.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Drilling Fluids (mud) Program:

Interval	Mud Weight	Fluid Loss	Viscosity	Mud Type
0' – 2000'		No cntrl		Air/mist
2000'-3000'	8.4-8.6	No cntrl	28-36	Water
3000'-7241'	8.8-10.2	8 - 10 ml	32-42	Water/Gel

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blowout will be available at the well site during drilling operations.

6. Evaluation Program:

Tests: No tests are currently planned.

Coring: No cores are currently planned.

Samples: No sampling is currently planned.

Logging

- Dual Induction – SFL /Gamma Ray/Caliper/SP/TDLT/CNL/ML TD to Base Surface Casing
- Cement Bond Log / Gamma Ray: TD to Base of Surface Casing or Top of Cement if below Base of Surface Casing

Stimulation: A stimulation or frac treatment will be designed for completion of this well based on openhole log analysis. The drill site, as approved, will be sufficient size to accommodate all completion activities.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 3,765 psi (calculated at 0.52psi/foot of hole) and maximum anticipated surface pressure equals approximately 2,172 psi (anticipated bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot of hole).

8. Anticipated Starting Dates:

- Anticipated Commencement Date- Within one year of APD issue.
- Drilling Days- Approximately 10 days
- Completion Days - Approximately 10 days
- Anticipate location construction within 30 days of permit issue.

9. Variances:

None anticipated

10. Other:

A Cultural Resource Inventory and Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The reports shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust lands Administration upon their receipt.

Asphalt Wash 10-23-23-33

**NESW Sec 33-T10S-R23E
Uintah County, Utah**

Lease #: UTU-73451

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are as follows:

Beginning at the city of Bonanza, Utah. Leave the city of Bonanza heading south on state highway 45 for a distance of approximately 5.7 miles where there is a turn-off to the right. Turn right, leaving state highway 45, and proceed southwest for a distance of approximately 5.1 miles (3.2 + 1.9 as shown on Topo "A"). The road then turns to the west; proceed northwesterly along said road for a distance of approximately 3.7 miles. Said road then turns to the southwest; proceed southwesterly, then westerly, for a distance of approximately 3.2 miles where the road forks. Turn left and bear southerly along the Asphalt Wash road for a distance of 3.0 miles where the road forks near a landing strip. Stay right, and continue heading south along the West Fork road for a distance of approximately 6.5 miles where there is a turn-off to the right. Turn right and bear westerly for a distance of approximately 1.7 miles. The road then turns to the north; proceed northerly along said road for a distance of approximately 3.8 miles where there is a turn-off to the left. Turn left and bear northwest for a distance of approximately 1.4 miles where there is a fork in the road near a landing strip. Turn right and bear northerly for a distance of approximately 2.1 miles where the said road turns and bears southwest. Continue along said road as it turns and bears southwest and continue bearing southwest for a distance of approximately 1.5 miles. The road then turns to the north; proceed northerly for a distance of approximately 2.2 miles. Existing access then ends. Existing access then ends. Proceed northerly for a distance of approximately 9,710' (about 1.8 mi.) along the proposed Asphalt Wash 10-23-23-33 well pad.

Total distance from Bonanza, Utah to the proposed well location is approximately four and one-half miles in a south-southeasterly direction.

2. Planned Access Roads:

The proposed access (all on federal lands) road will be approximately 4,655 feet of new construction located ON-LEASE and 630 feet of new construction OFF-LEASE. Please refer to Topo Map "B" for the takeoff point for the new road construction (*Proposed Access Road*).

The pad is also located on federal lands.

The proposed access road will be utilized to transport personnel, equipment and supplies to and from the proposed well site during drilling, completion and production operations. The road will be utilized year round.

The access road will be crowned 2% to 3%, ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet right-of-way. Maximum grade of road is 5% or less. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. No fence crossings, culverts, turnouts, cattle guards or major cuts and fills are required. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. **Location of Existing Wells within a One-Mile radius (See "Topo" Map "C" attached):**

The following wells are wells located within a one (1) mile radius of the proposed location.

- | | | | |
|----|-------|------------------------------|--------------------------------|
| a. | None: | Water Wells: | |
| b. | None: | Injection Wells: | |
| c. | None: | Producing Wells: | (2) |
| | | i. | Rock House 2D-32 43-047-35760 |
| | | ii. | Rock House 10D-32 43-047-35761 |
| d. | None: | Drilling Wells: | |
| e. | None: | Shut-in Wells: | |
| f. | None: | Temporarily Abandoned Wells: | (1 – Abandon Location) |
| | | i. | Saddle Tree 13-34 43-047-31782 |
| g. | None: | Disposal Wells: | |
| h. | None: | Abandoned Wells: | |
| i. | None: | Dry Holes: | |
| j. | None: | Observation Wells: | |

4. Location of Existing and/or Proposed Facilities:

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank and be independent of the back cut.

All permanent (on site for six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Inter-Agency Committee

All facilities will be painted within 6 months of installation. The color shall be Carlsbad Canyon (2.5Y 6/2). Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Gas Gathering Pipeline:

- | | | |
|----|--------|----------------|
| a. | 4,575' | BLM (ON-LEASE) |
| b. | -0- | OFF-LEASE |

If the well is capable of economic production, a surface gas gathering line and related equipment shall be installed. The surface gas gathering line shall be in use year round. A total of approximately 4,575 feet of surface gas gathering pipeline shall be laid on the surface to minimize surface disturbance:

- The pipeline will be 4 inch or less diameter steel surface pipeline,
- shall be laid beside the access road,

The proposed surface pipeline will begin at the well site and be laid along side the access road until ties into the proposed pipeline to the Asphalt Wash 44-34 Well. All the pipeline will be located ON-LEASE.

The line will be welded together and pulled from the well site location and tie-in point when practical; however, it may be necessary to utilize the access road for welding of the line. The line will then be boomed off to the side of the road. That portion of the pipeline not located along the road will be laid with as little surface disturbance as practical. The gas meter run will be located within 500 feet of the wellhead. The meter run will be housed. The gas gathering line will be buried or anchored down from the wellhead to the meter.

Upon plugging and abandonment, the gas gathering line will be removed and the disturbed area will be re-contoured and restored as near as practical to the original condition. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

5. Location and Type of Water Supply:

Water will be obtained from the White River by Tu and Frum, Inc. Water User Claim #49-2185, Application #T75517, or by Target Trucking Water User Claim #43-2195, or by Dalbo Inc. Water User Claim #43-8496

Water will be hauled to the location over the roads marked on "Topo" Maps "A" and "B."

No water well is to be drilled on this lease.

6 Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized for location and access road construction.

Any gravel will be obtained from a commercial source; however, gravel sized rock debris associated with location and access road construction may be used as access road surfacing material.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break or allow discharge of liquids.

The reserve pit will be lined with ¼ felt and a minimum of 16 mm plastic with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the will be disposed of in the pit.

A chemical portable toilet will be furnished with the drilling rig. The toilet will be replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

Garbage, trash and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well.

Produced oil will be stored in an oil tank and then hauled by truck to a crude purchaser facility. Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to an approved disposal site.

8 Ancillary Facilities:

During drilling operations, approximately 20 days, the site will be a manned camp. Three or four additional trailers will be on location to serve as the crews' housing and eating facilities. These will be located on the perimeter of the pad site within the topsoil stockpiles. Refer to Sheet 4.

9. Well Site Layout: (Refer to Sheets #2, #3, and #4)

The attached Location Layout Diagrams described drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s) and surface material stockpiles(s).

Please see the attached diagram for rig orientation and access roads.

The top soil will be windrowed rather than piled. It will be reseeded and track walker at the time the location is constructed. Seeding will be with the determined during the onsite. (Refer to "Seed Mixture for Windrowed Top Soil Will included:" following herein.

The top soil removed from the pit area will be store separately and will not be reseeded until the pit is reclaimed.

All pits shall be fence to the following minimum standards:

- a. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

- b. The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches over the new wire. Total height of the fence shall be at least 42 inches.
- c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- d. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two fence posts shall be no greater than 16 feet.
- e. All wire shall be stretched by, using a stretching device, before it is attached to corner posts.
- f. The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.
- g. Location size may change prior to drilling the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling, the location will be re-surveyed and a Form 9 will be submitted.

10. Plans for Surface Reclamation:

Producing Location:

- a. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, materials, trash and debris not required for production.
- b. Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 40CFR 3162.7.
- c. Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.
- d. The reserve pit and that portion of the location not needed for production facilities/operations will be re-contoured to the approximated natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.
- e. To prevent surface water(s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface 3 feet above surrounding round surface to allow the reclaimed pit area to drain effectively.
- f. Upon completion of back filling, leveling and re-contouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

- a. Abandoned well sites, roads and other disturbed areas will be restored as nearly as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions and re-establishment of vegetation as specified.

- b. All disturbed surfaces will be re-contoured to the approximated natural contours with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

Seed Mixture for Windrowed Top Soil Will Included:

The appropriate surface management agency will be contacted for the required seed mixture and dates.

Surface Ownership: Location, Access and Pipeline Route:

Wellsite: Federal

Access: Federal

Pipeline: Federal

11. Other Information

Wildlife Stipulations:

Wildlife stipulations and possible activity restrictions will be detailed in the conditions of approval" received with an approved Permit to Drill. Operator will comply with these wildlife stipulations, if any.

Archeology:

A Cultural Resource Inventory Report is being conducted for the well location, access route and pipeline. The report shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust Lands Administration upon its receipt.

Paleontology:

A Paleontology Reconnaissance Report is being conducted for the well location, access route and pipeline. The report shall be submitted to the Division of Oil, gas and Mining and the School and Institutional Trust Lands Administration upon its receipt.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the Antiquities Act of June 8, 1906) are discovered, all operations which would affect such sites will be suspended and the discovery reported promptly to the surface management agency.

All lease operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, and the approved Plan of Operations and all applicable Notice to Lessees. The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Directions to the Asphalt Wash 10-23-23-30 Well Pad

Beginning at the city of Bonanza, Utah. Leave the city of Bonanza heading south on state highway 45 for a distance of approximately 5.7 miles where there is a turn-off to the right. Turn right, leaving state highway 45, and proceed southwest for a distance of approximately 5.1 miles (3.2 + 1.9 as shown on Topo "A"). The road then turns to the west; proceed northwesterly along said road for a distance of approximately 3.7 miles. Said road then turns to the southwest; proceed southwesterly, then westerly, for a distance of approximately 3.2 miles where the road forks. Turn left and bear southerly along the Asphalt Wash road for a distance of 3.0 miles where the road forks near a landing strip. Stay right, and continue heading south along the West Fork road for a distance of approximately 6.5 miles where there is a turn-off to the right. Turn right and bear westerly for a distance of approximately 1.7 miles. The road then turns to the north; proceed northerly along said road for a distance of approximately 3.8 miles where there is a turn-off to the left. Turn left and bear northwest for a distance of approximately 1.4 miles where there is a fork in the road near a landing strip. Turn right and bear northerly for a distance of approximately 2.1 miles where the said road turns and bears southwest. Continue along said road as it turns and bears southwest and continue bearing southwest for a distance of approximately 1.5 miles. The road then turns to the north; proceed northerly for a distance of approximately 2.2 miles. Existing access then ends. Existing access then ends. Proceed northerly for a distance of approximately 9,710' (about 1.8 mi.) along proposed access to the proposed Asphalt Wash 10-23-23-30 well pad.

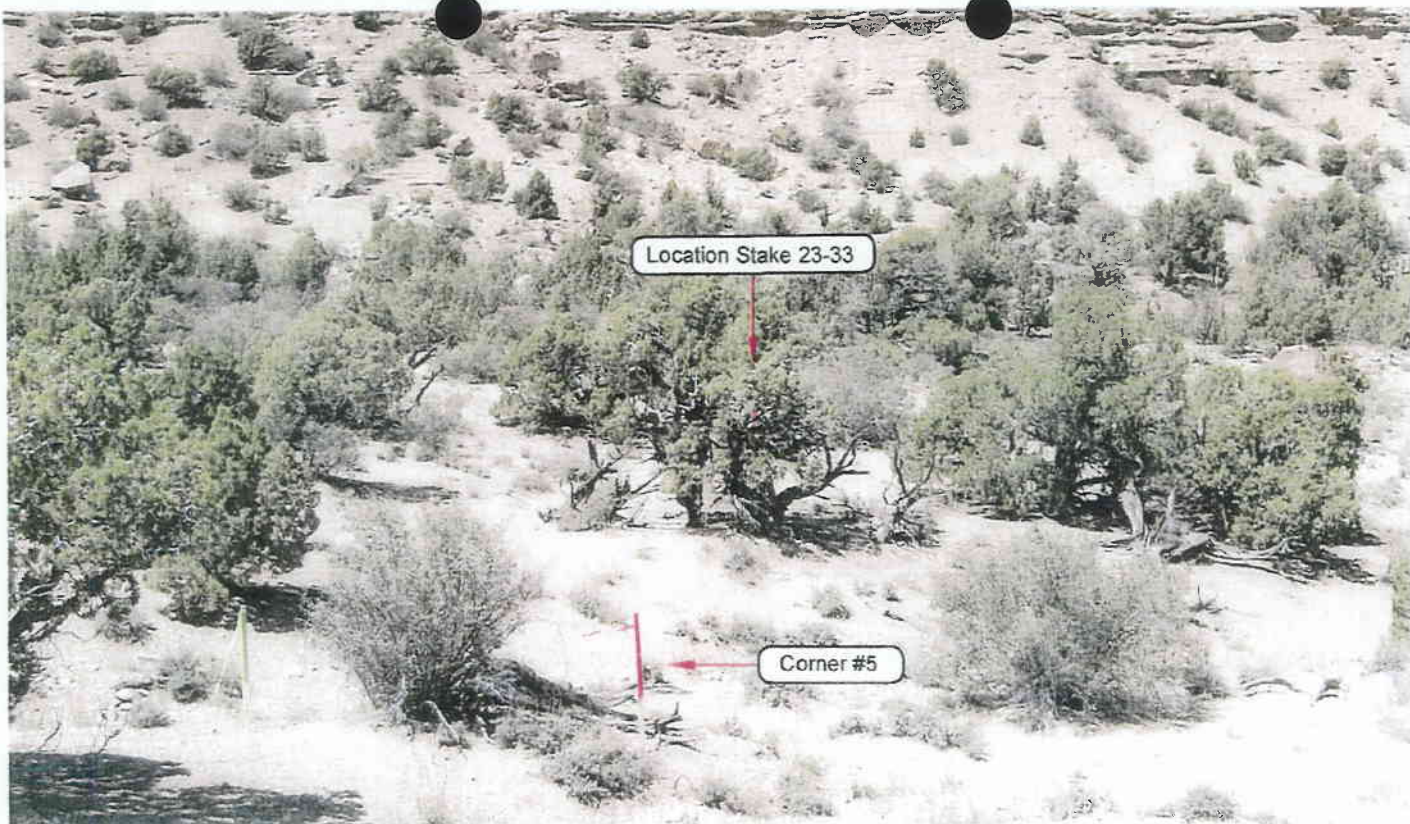


PHOTO VIEW: FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO VIEW: FROM BEGINNING OF PROPOSED ROAD

CAMERA ANGLE: SOUTHWESTERLY

ENDURING RESOURCES

Asphalt Wash 10-23-23-33
SECTION 33 , T10S, R23E, S.L.B.&M.
1990' FSL & 2135' FWL

LOCATION PHOTOS

TAKEN BY: K.R.K.

DRAWN BY: T.D.H.

DATE TAKEN: 05-18-05

DATE DRAWN: 05-19-05

REVISED:

Timberline Land Surveying, Inc.


38 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET
1
OF 10

ENDURING RESOURCE

CUT SHEET

ASPHALT WASH 10-23-23-33

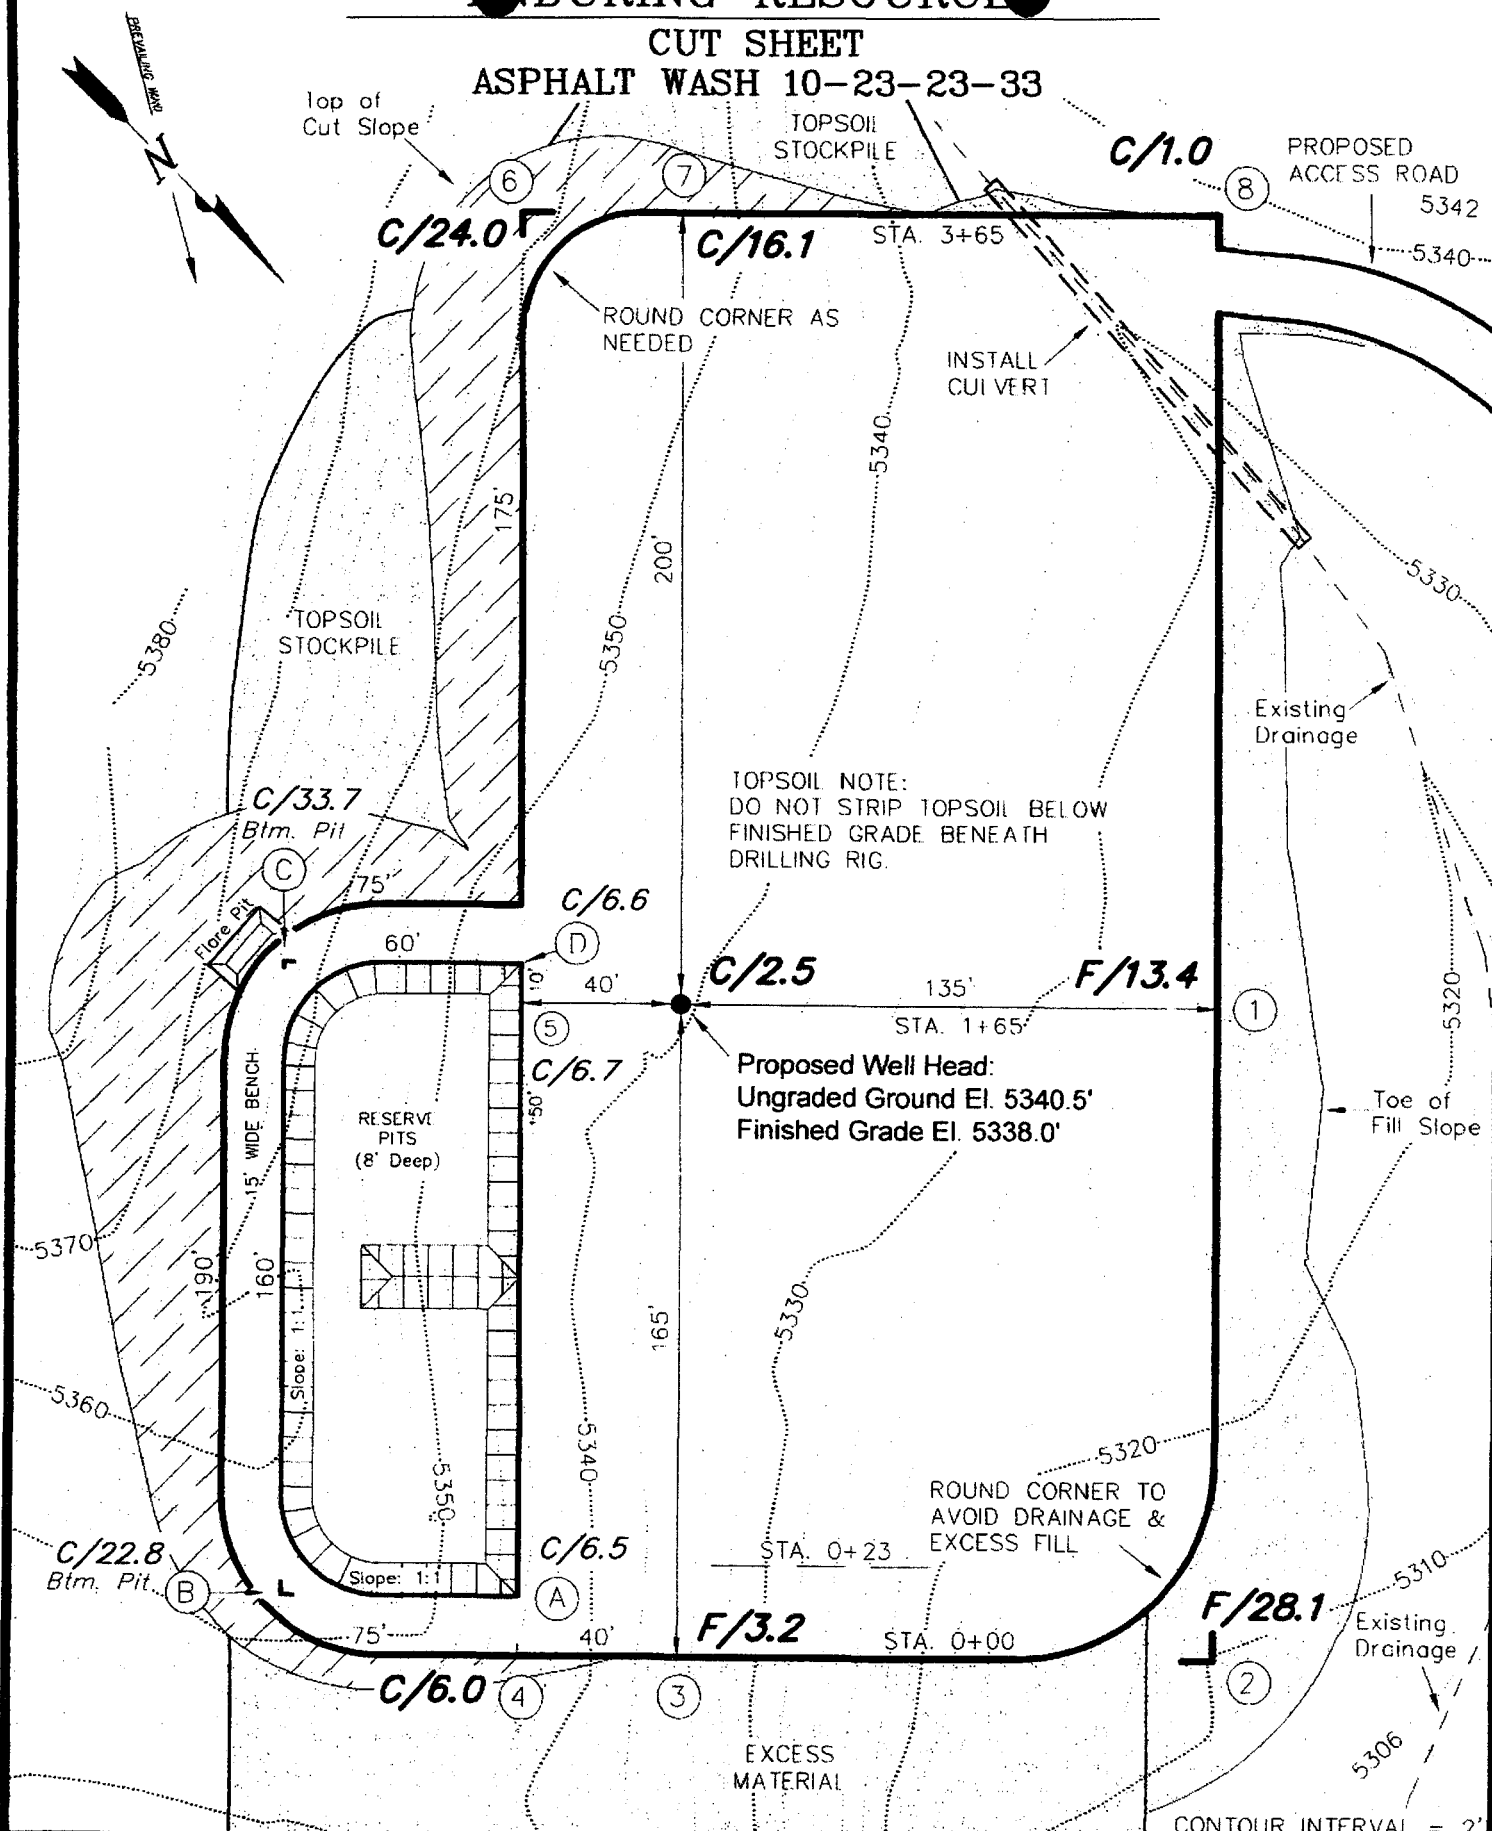

TOPSOIL NOTE:
DO NOT STRIP TOPSOIL BELOW
FINISHED GRADE BENEATH
DRILLING RIG.

Proposed Well Head:
Ungraded Ground El. 5340.5'
Finished Grade El. 5338.0'

CONTOUR INTERVAL = 2'

Section 33, T10S, R23E, S1.B.&M.

Qtr/Qtr Location: NE SW

Footage Location: 1990' FSL & 2135' FWL

Date Surveyed:
5-18-05

Date Drawn:
5-23-05

Date Last Revision:

Timberline (435) 789-1365
Land Surveying, Inc.

SHEET

Surveyed By: K.R.K.

Drawn By: J.R.S.

Scale: 1" = 50'


38 WEST 100 NORTH VERNAL, UTAH 84078

3

OF 10

ENDURING RESOURCES

CROSS SECTIONS ASPHALT WASH 10-23-23-33

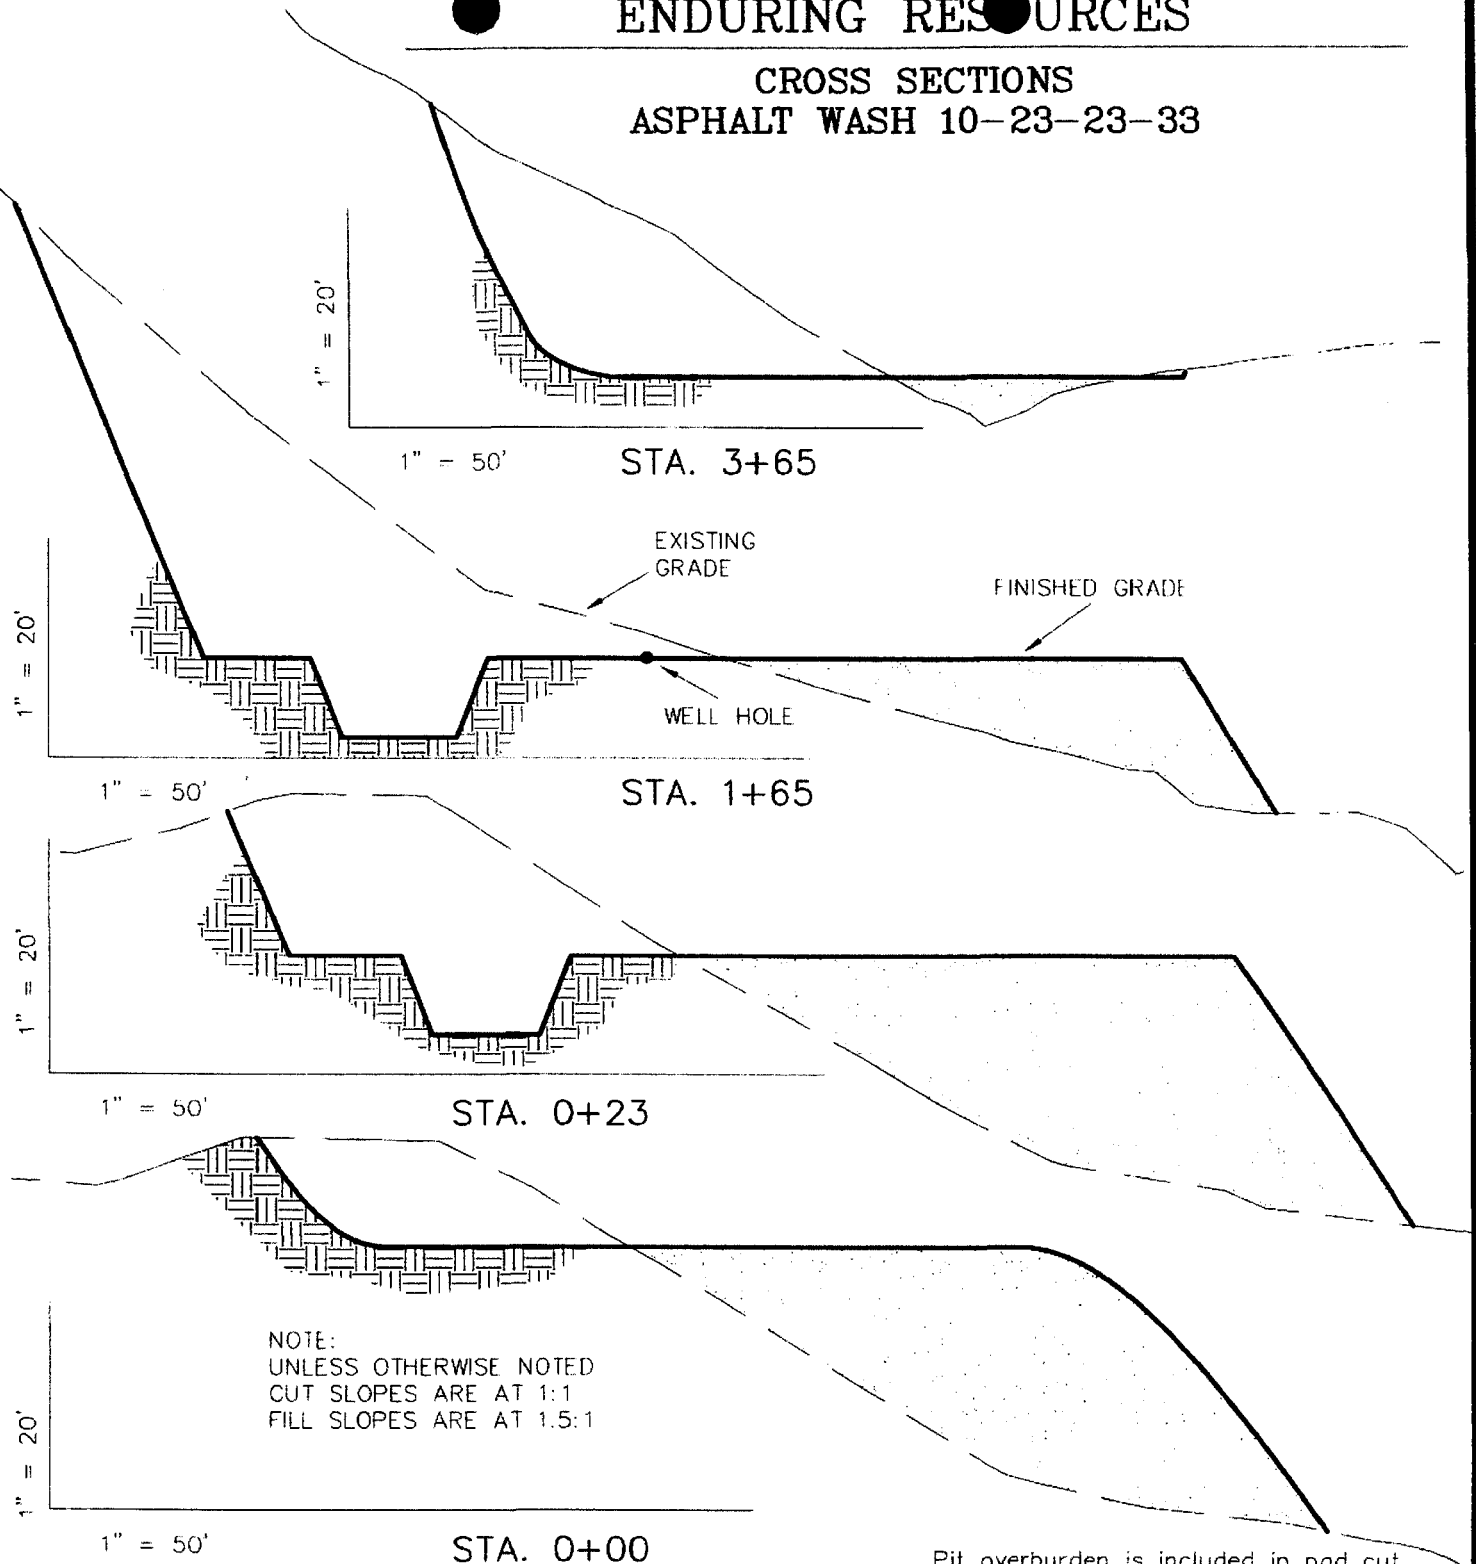

REFERENCE POINTS

185' NORTHWESTERLY = 5322.3'
 235' NORTHWESTERLY = 5325.4'
 250' SOUTHWESTERLY = 5352.9'
 283' SOUTHWESTERLY = 5344.2'

ESTIMATED EARTHWORK QUANTITIES (No shrink or swell adjustments have been used) (Expressed in Cubic Yards)


ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	18,310	17,030	Topsoil is not included in Pad Cut	1,280
PIT	2,230	0		2,230
TOTALS	20,540	17,030	1,940	3,510

Excess Material after Pit Rehabilitation = 2,390 Cu. Yds.

Section 33, T10S, R23E, S.L.B.&M.	Qtr/Qtr Location: NE SW	Footage Location: 1990' FSL & 2135' FWL
Date Surveyed: 5-18-05	Date Drawn: 5-23-05	Date Last Revision:
Surveyed By: K.R.K.	Drawn By: J.R.S.	Scale: 1" = 50'
Timberline Land Surveying, Inc. 38 WEST 100 NORTH VERNAL, UTAH 84078		
(435) 789-1365		
SHEET 4 OF 10		

EDURING RESOURCE


TYPICAL RIG LAYOUT ASPHALT WASH 10-23-23-33

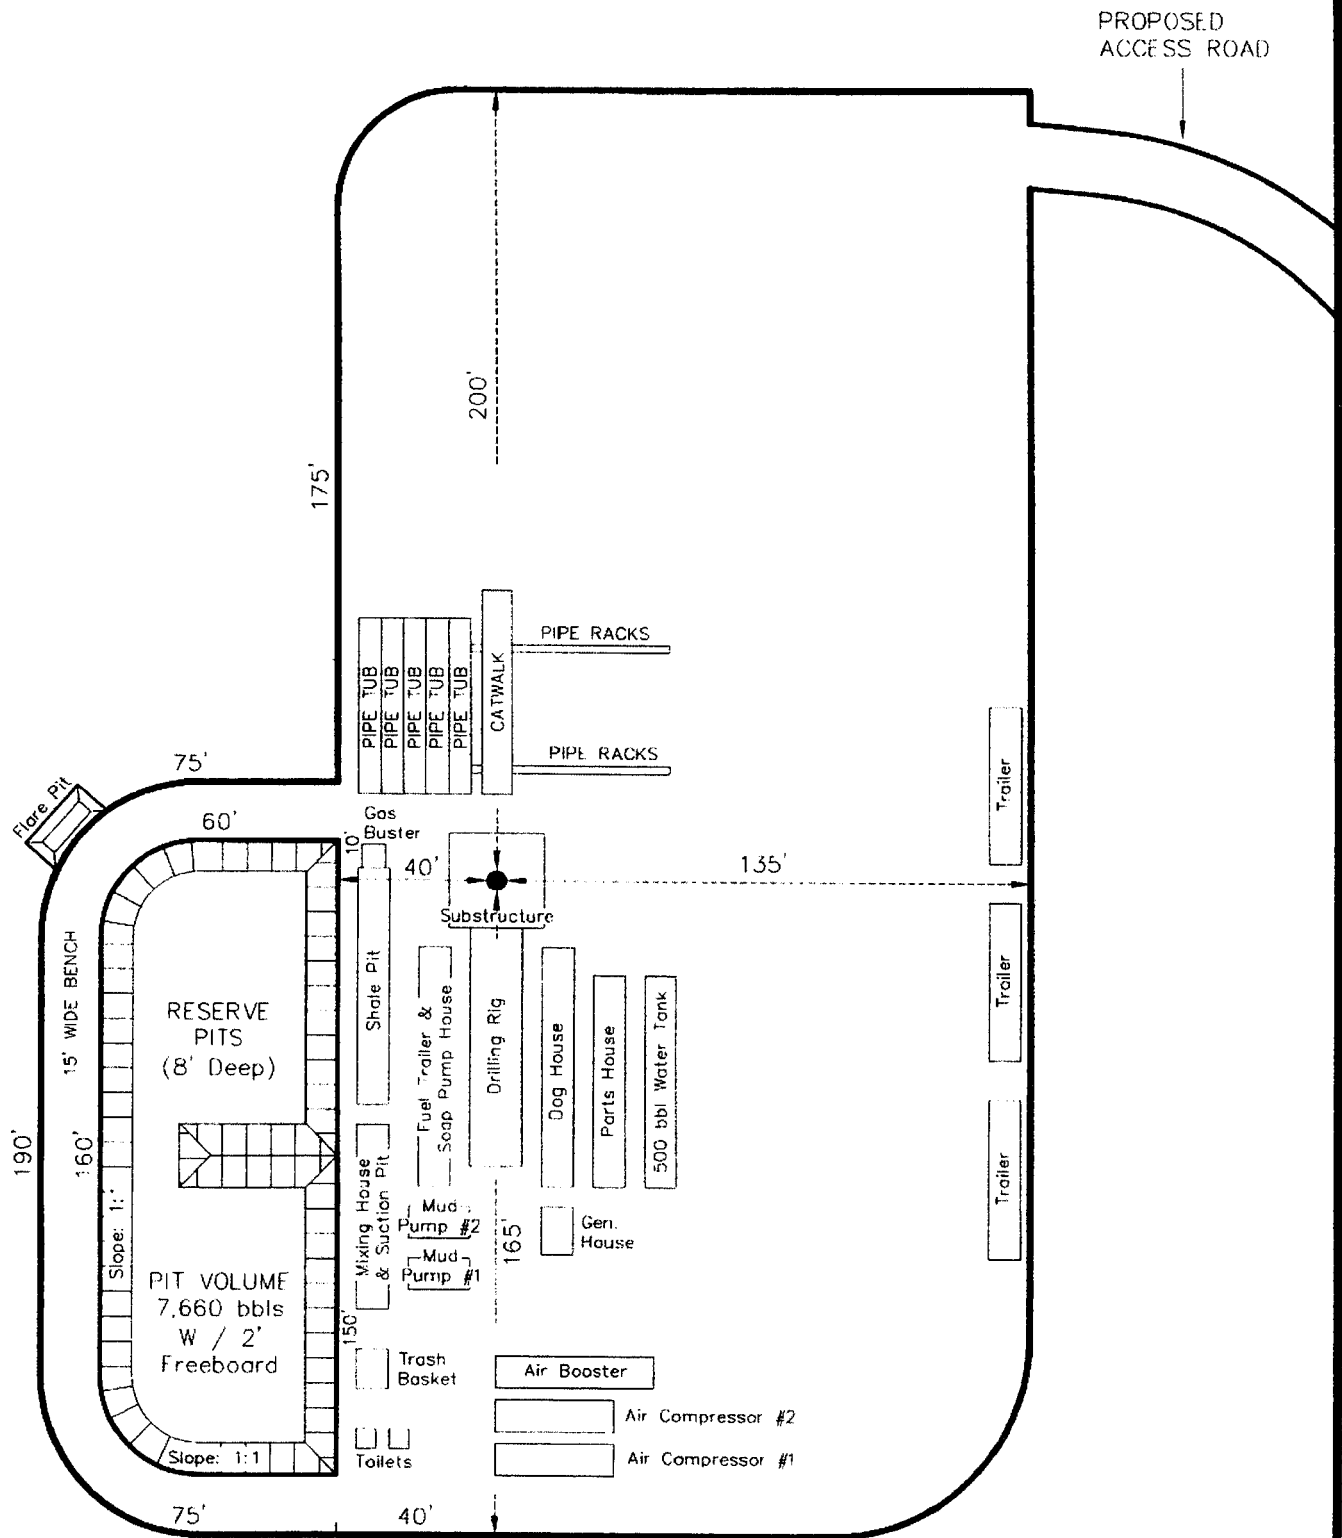

Section 33, T10S, R23E, S.L.B.&M.		Qtr/Qtr Location: NE SW	Footage Location: 1990' FSL & 2135' FWL
Date Surveyed: 5-18-05	Date Drawn: 5-23-05	Date Last Revision:	Timberline (435) 789-1365 Land Surveying, Inc. 38 WEST 100 NORTH VERNAL, UTAH 84078
Surveyed By: K.R.K.	Drawn By: J.R.S.	Scale: 1" = 50'	
			SHEET 5 OF 10

PRODURING RESOURCE

TYPICAL PRODUCTION LAYOUT ASPHALT WASH 10-23-23-33

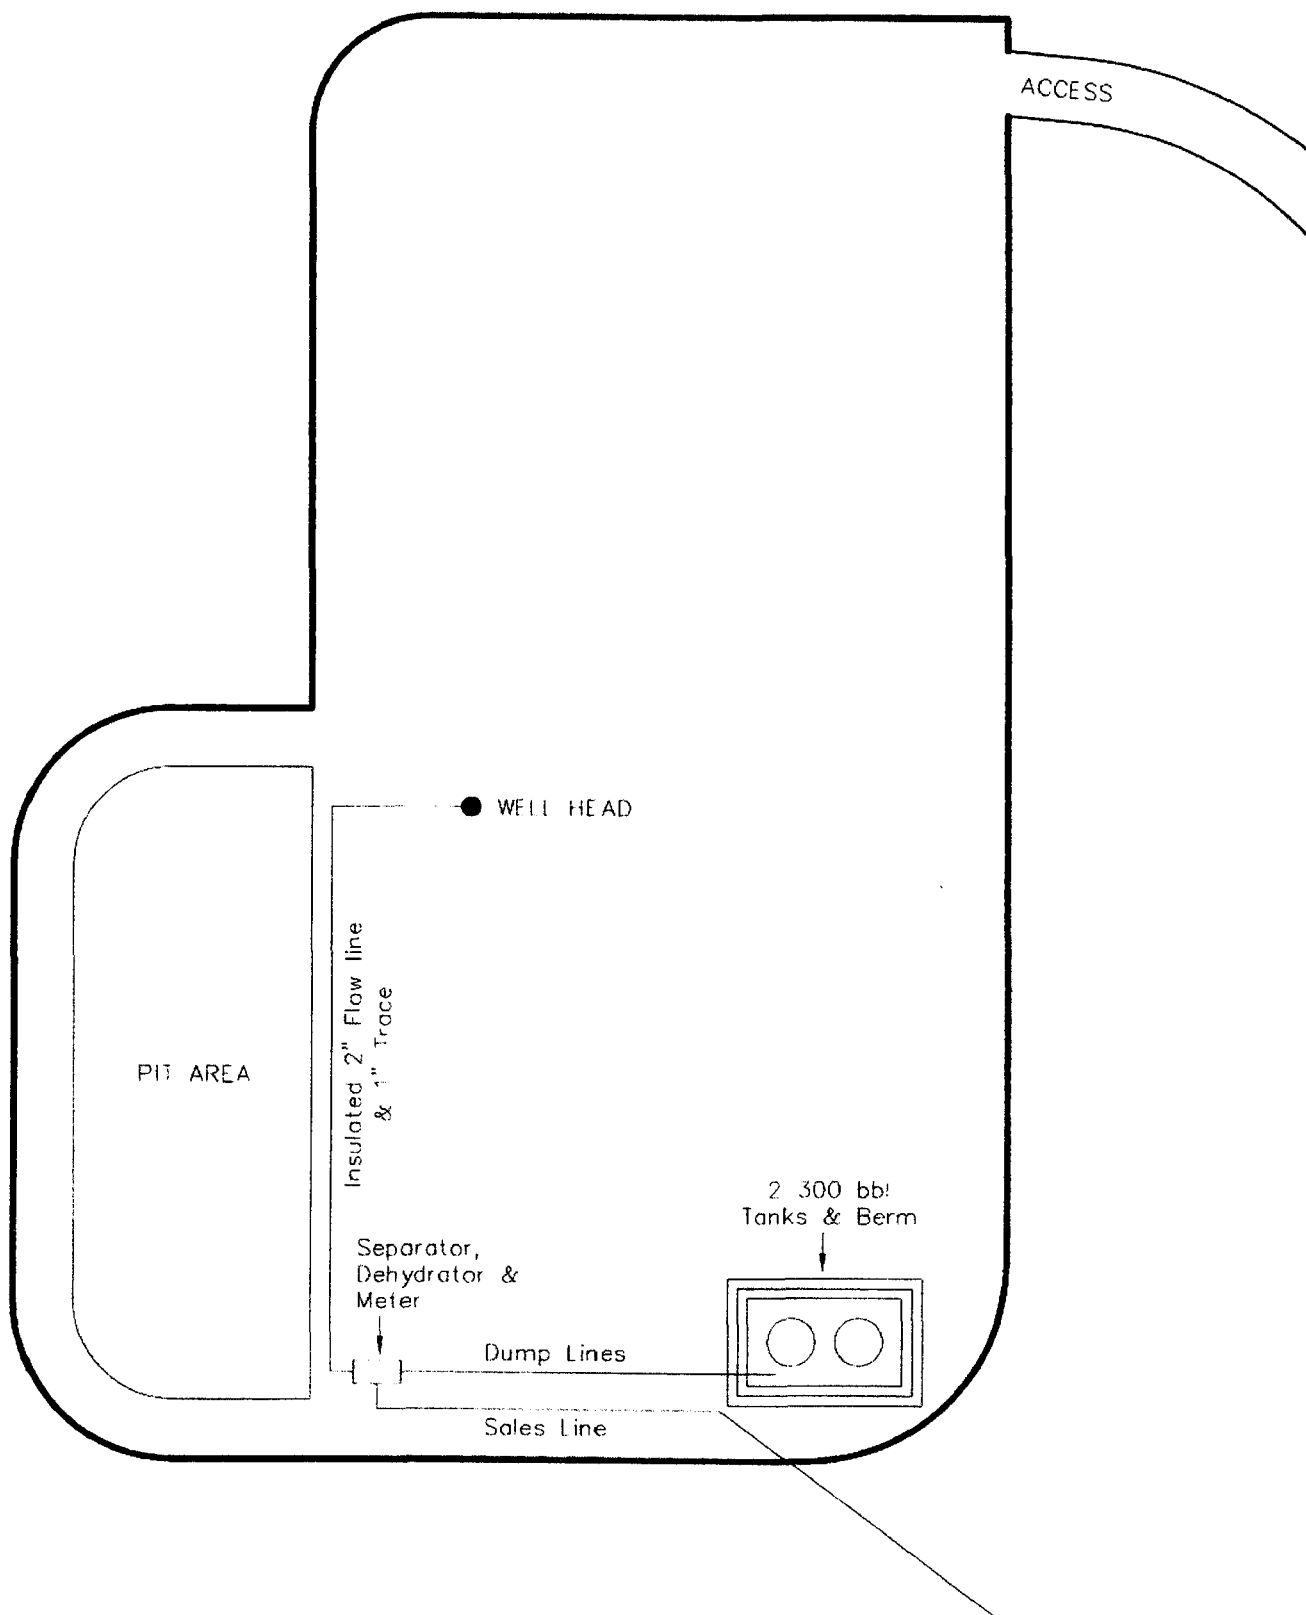

Section 33, T10S, R23E, S.L.B.&M.

Qtr/Qtr Location: NE SW

Footage Location: 1990' FSL & 2135' FWL

Date Surveyed:
5-18-05

Date Drawn:
5-23-05

Date Last Revision:

Timberline (435) 789-1365
Land Surveying, Inc.

SHEET

Surveyed By: K.R.K.


Drawn By: J.R.S

Scale: 1" = 50'

38 WEST 100 NORTH VERNAL, UTAH 84078

6

OF 10

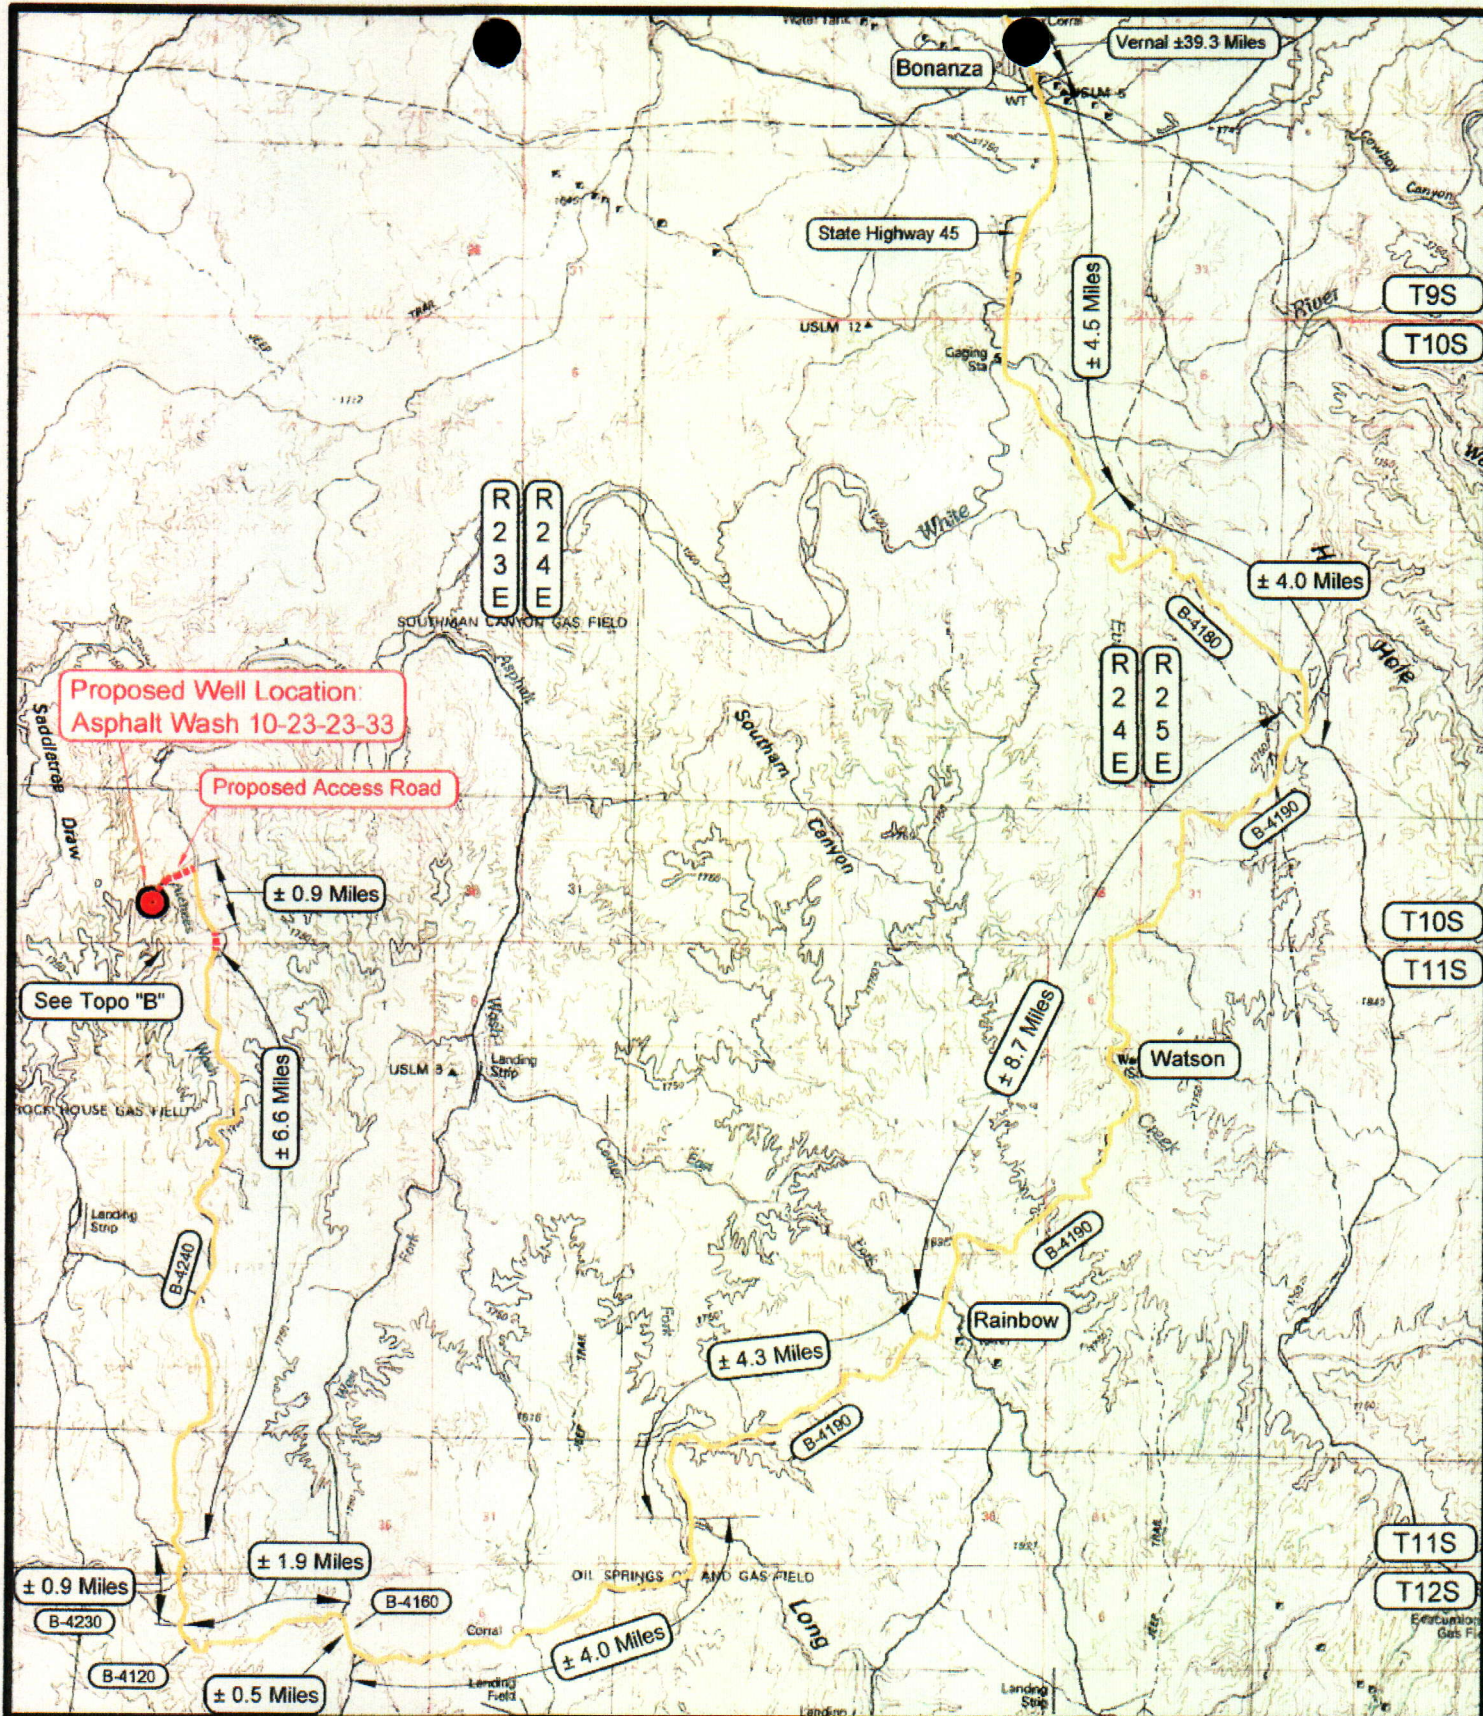

LEGEND

- = PROPOSED WELL LOCATION
- = EXISTING ROAD
- = EXISTING ROAD (TO BE IMPROVED)
- = PROPOSED ACCESS ROAD
- B-5460 = COUNTY ROAD CLASS & NUMBER

TOPOGRAPHIC MAP "A"

SCALE: 1:10,000'

DRAWN BY: T.D.H.

DATE SURVEYED: 05 18 05

DATE DRAWN: 05 19 05

REVISED:

ENDURING RESOURCES

Asphalt Wash 10-23-23-33
SECTION 33, T10S, R23E, S.L.B.&M.
1990' FSL & 2135' FWL


Timberline Land Surveying, Inc.

38 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET

7

OF 10

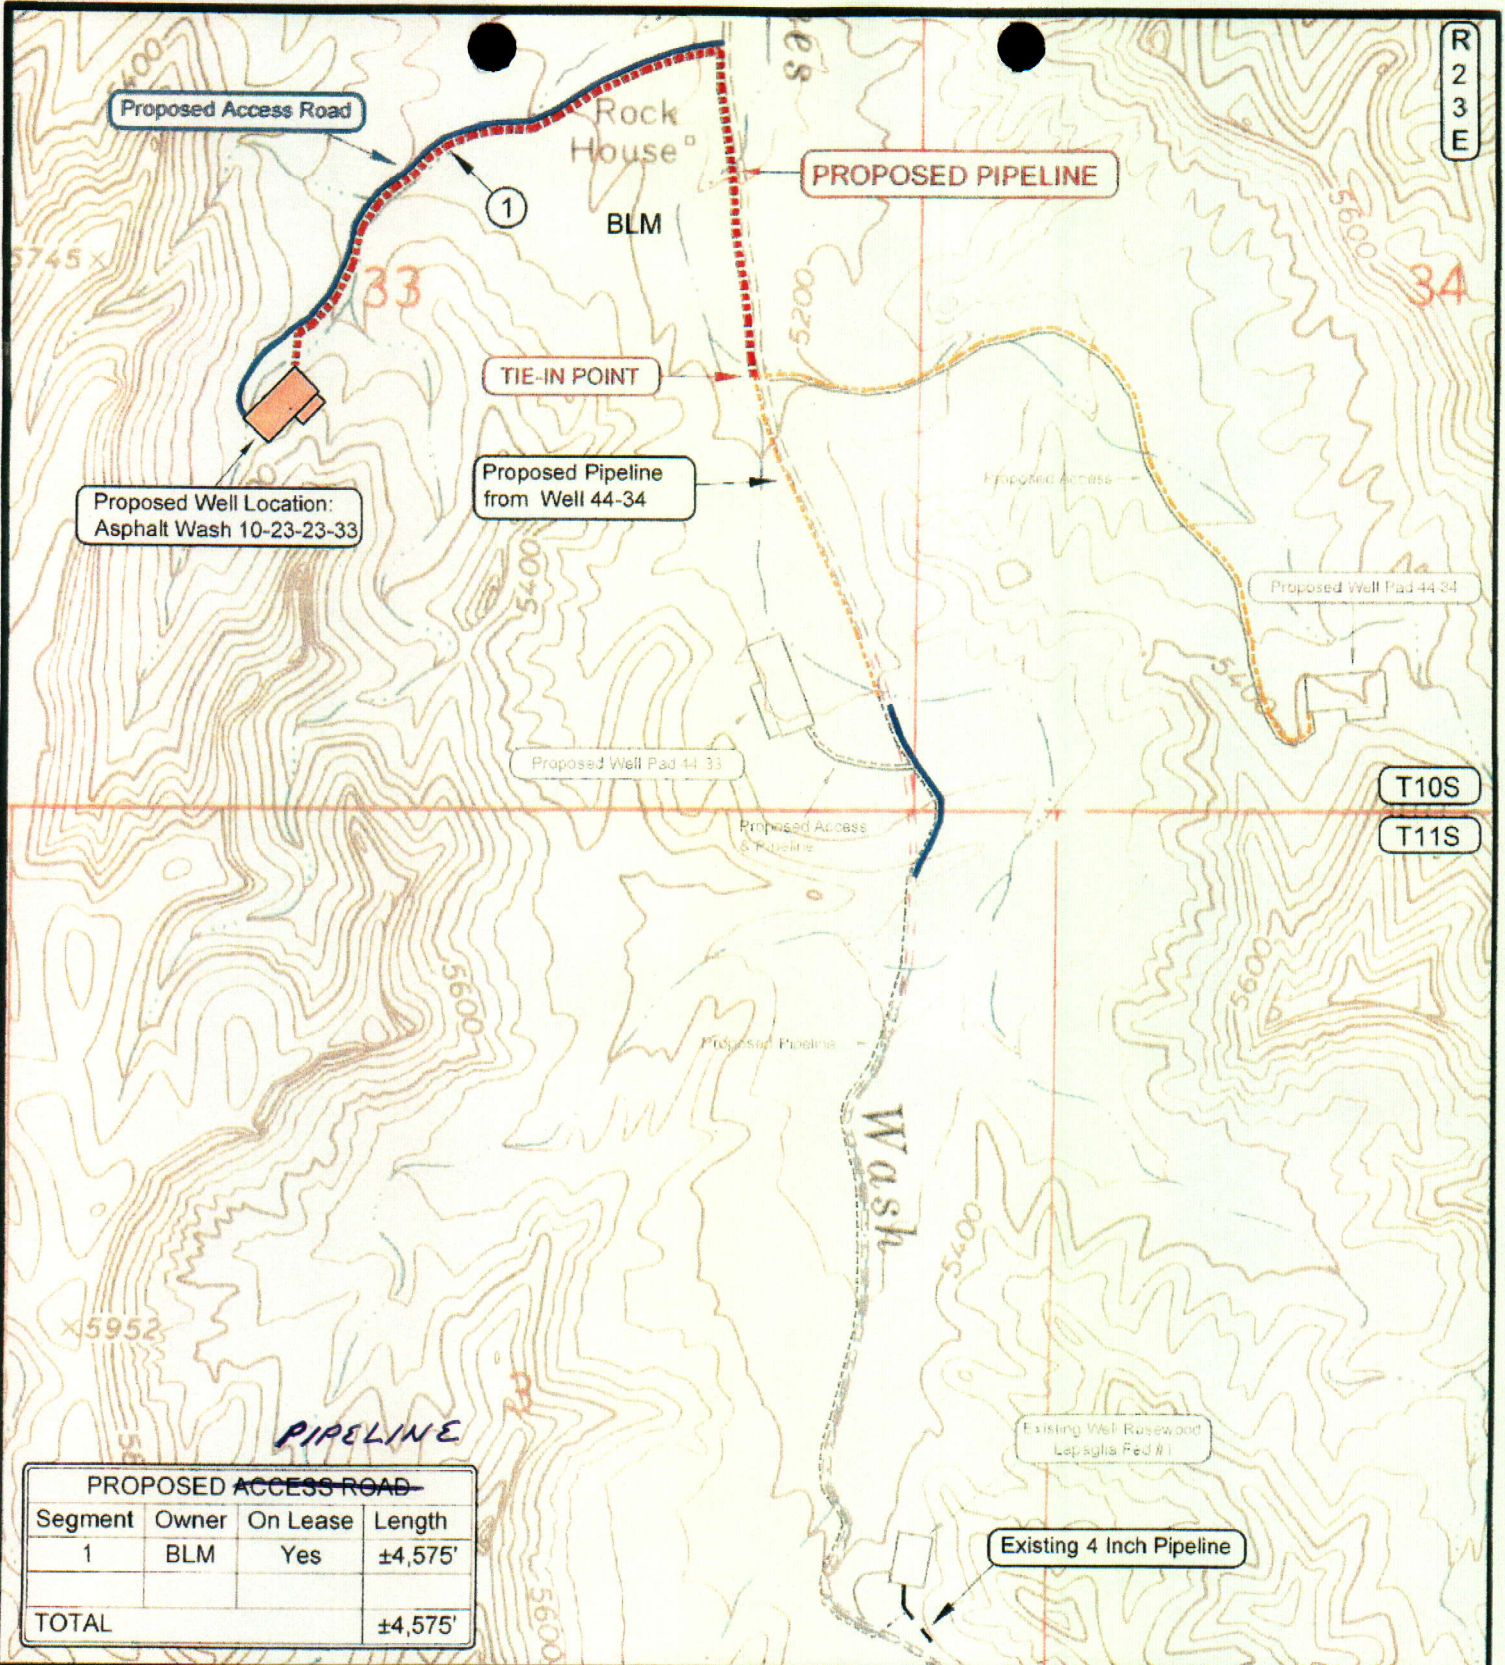

LEGEND

- = EXISTING PIPELINE
- = PROPOSED PIPELINE
- = PROPOSED ACCESS ROAD
- = LEASE LINE AND / OR PROPERTY LINE

TOPOGRAPHIC MAP "D"

SCALE: 1" = 1000'

DRAWN BY: T.D.H.

DATE SURVEYED: 05-18-05

DATE DRAWN: 05-19-05

REVISED: 07-20-05

ENDURING RESOURCES

Asphalt Wash 10-23-23-33
SECTION 33, T10S, R23E, S.L.B.&M.
1990' FSL & 2135' FWL


Timberline Land Surveying, Inc.

38 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET

10



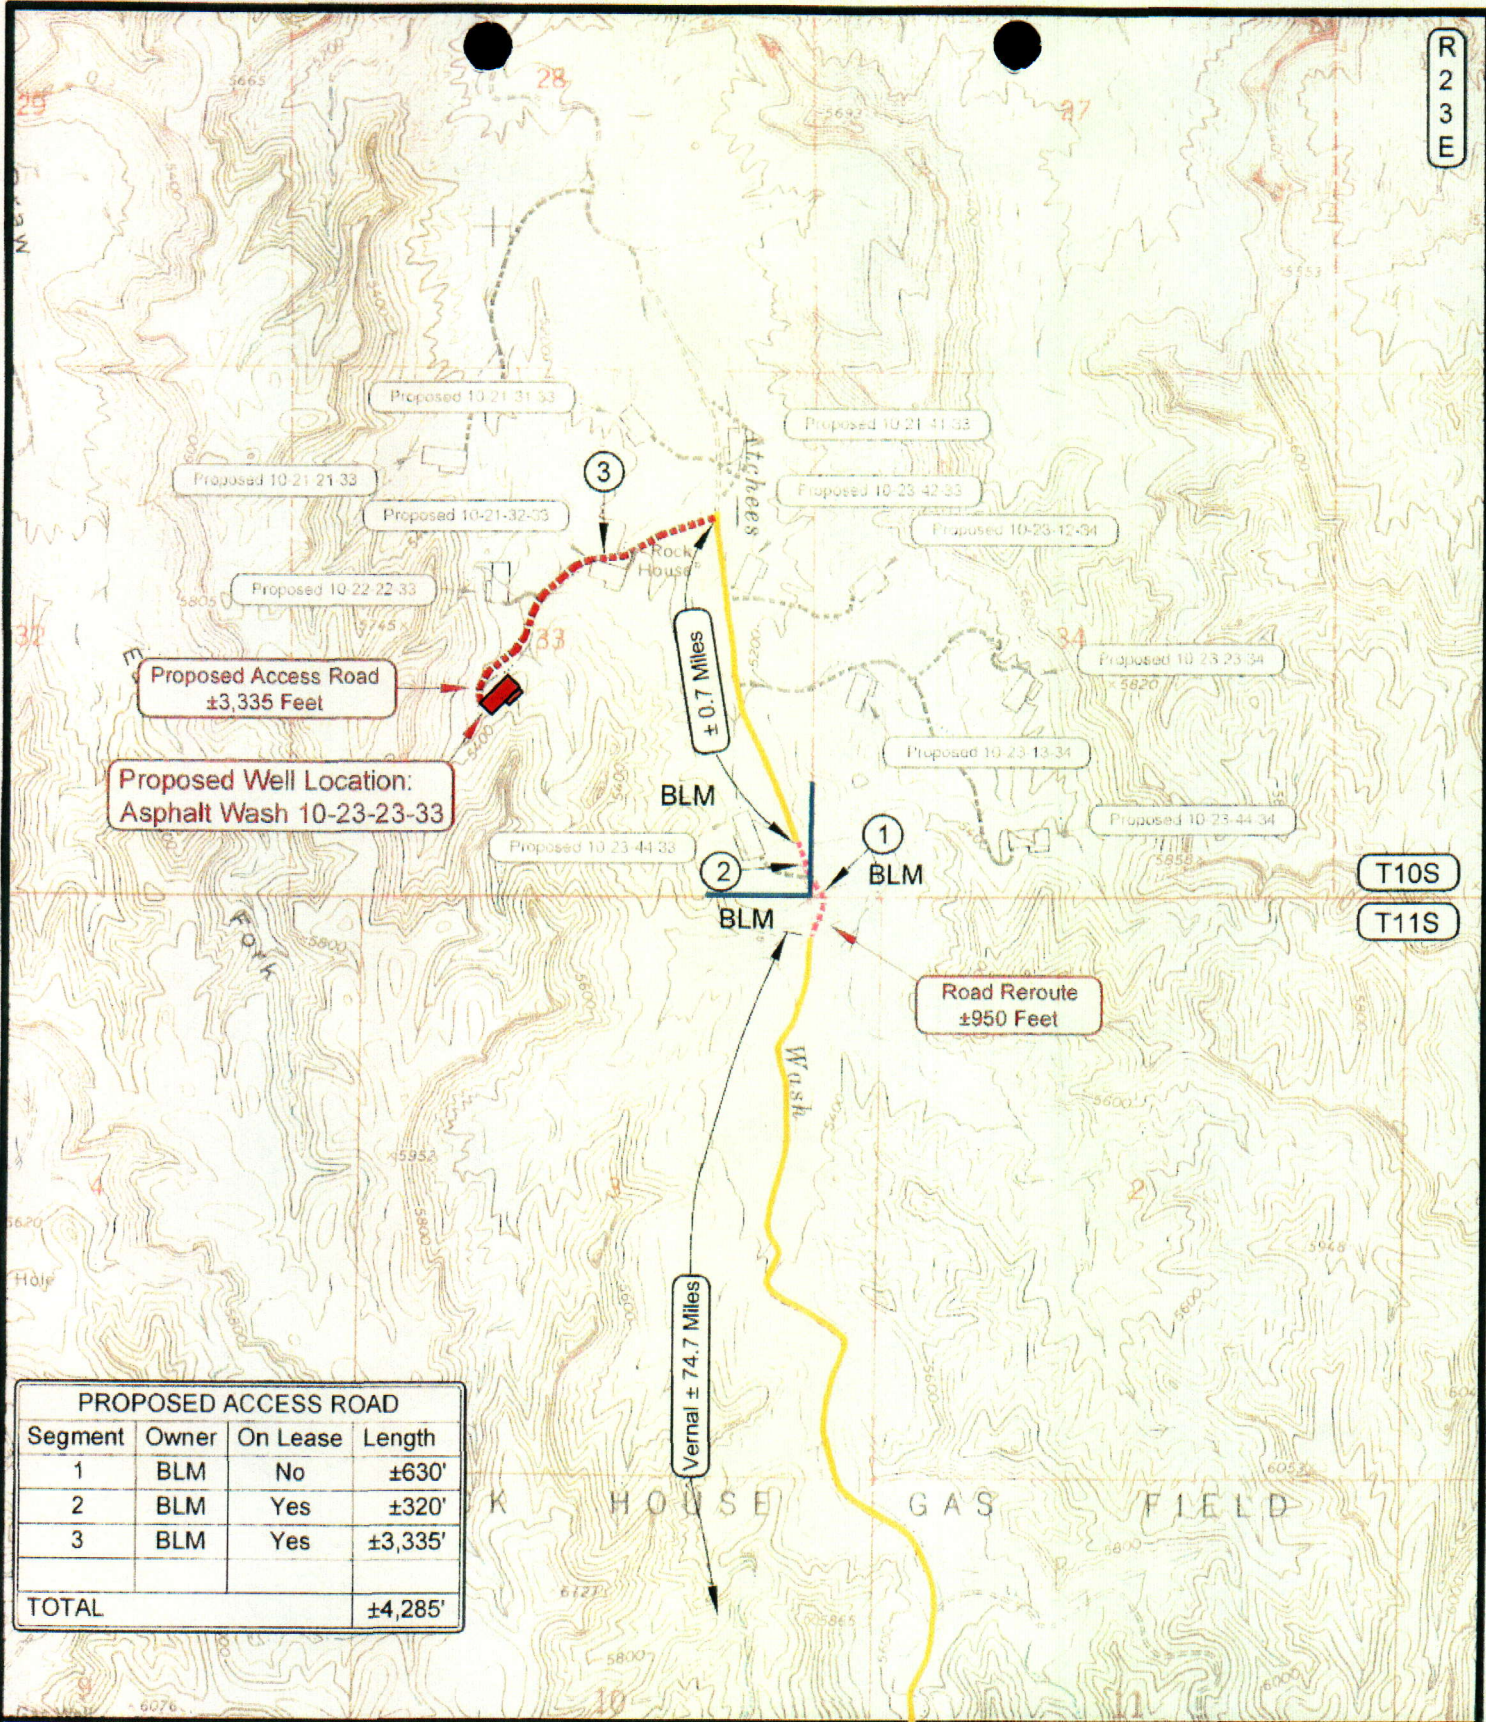


OF 10



PROPOSED ACCESS ROAD			
Segment	Owner	On Lease	Length
1	BLM	No	±630'
2	BLM	Yes	±320'
3	BLM	Yes	±3,335'
TOTAL			±4,285'

LEGEND

PROPOSED ACCESS ROAD

     = SUBJECT WELL
 = SHARED ACCESS

● = EXISTING ROAD

● = EXISTING ROAD (TO BE IMPROVED)

(B-5460) = COUNTY ROAD CLASS & NUMBER

= LEASE LINE AND / OR
PROPERTY LINE

ENDURING RESOURCES

Asphalt Wash 10-23-23-33
SECTION 33 , T10S, R23E, S.L.B.&M.
1990' FSL & 2135' FWL

Timberline Land Surveying, Inc.
38 West 100 North Vernal, Utah 84078
(435) 789-1365

SHEET
8
OF 10

TOPOGRAPHIC MAP "B"

DATE SURVEYED: 05-18-05


DATE DRAWN: 05-19-05

SCALE: 1" = 2000'

DRAWN BY: T.D.H.

REVISÉ: 07-20-05

R
2
3
E

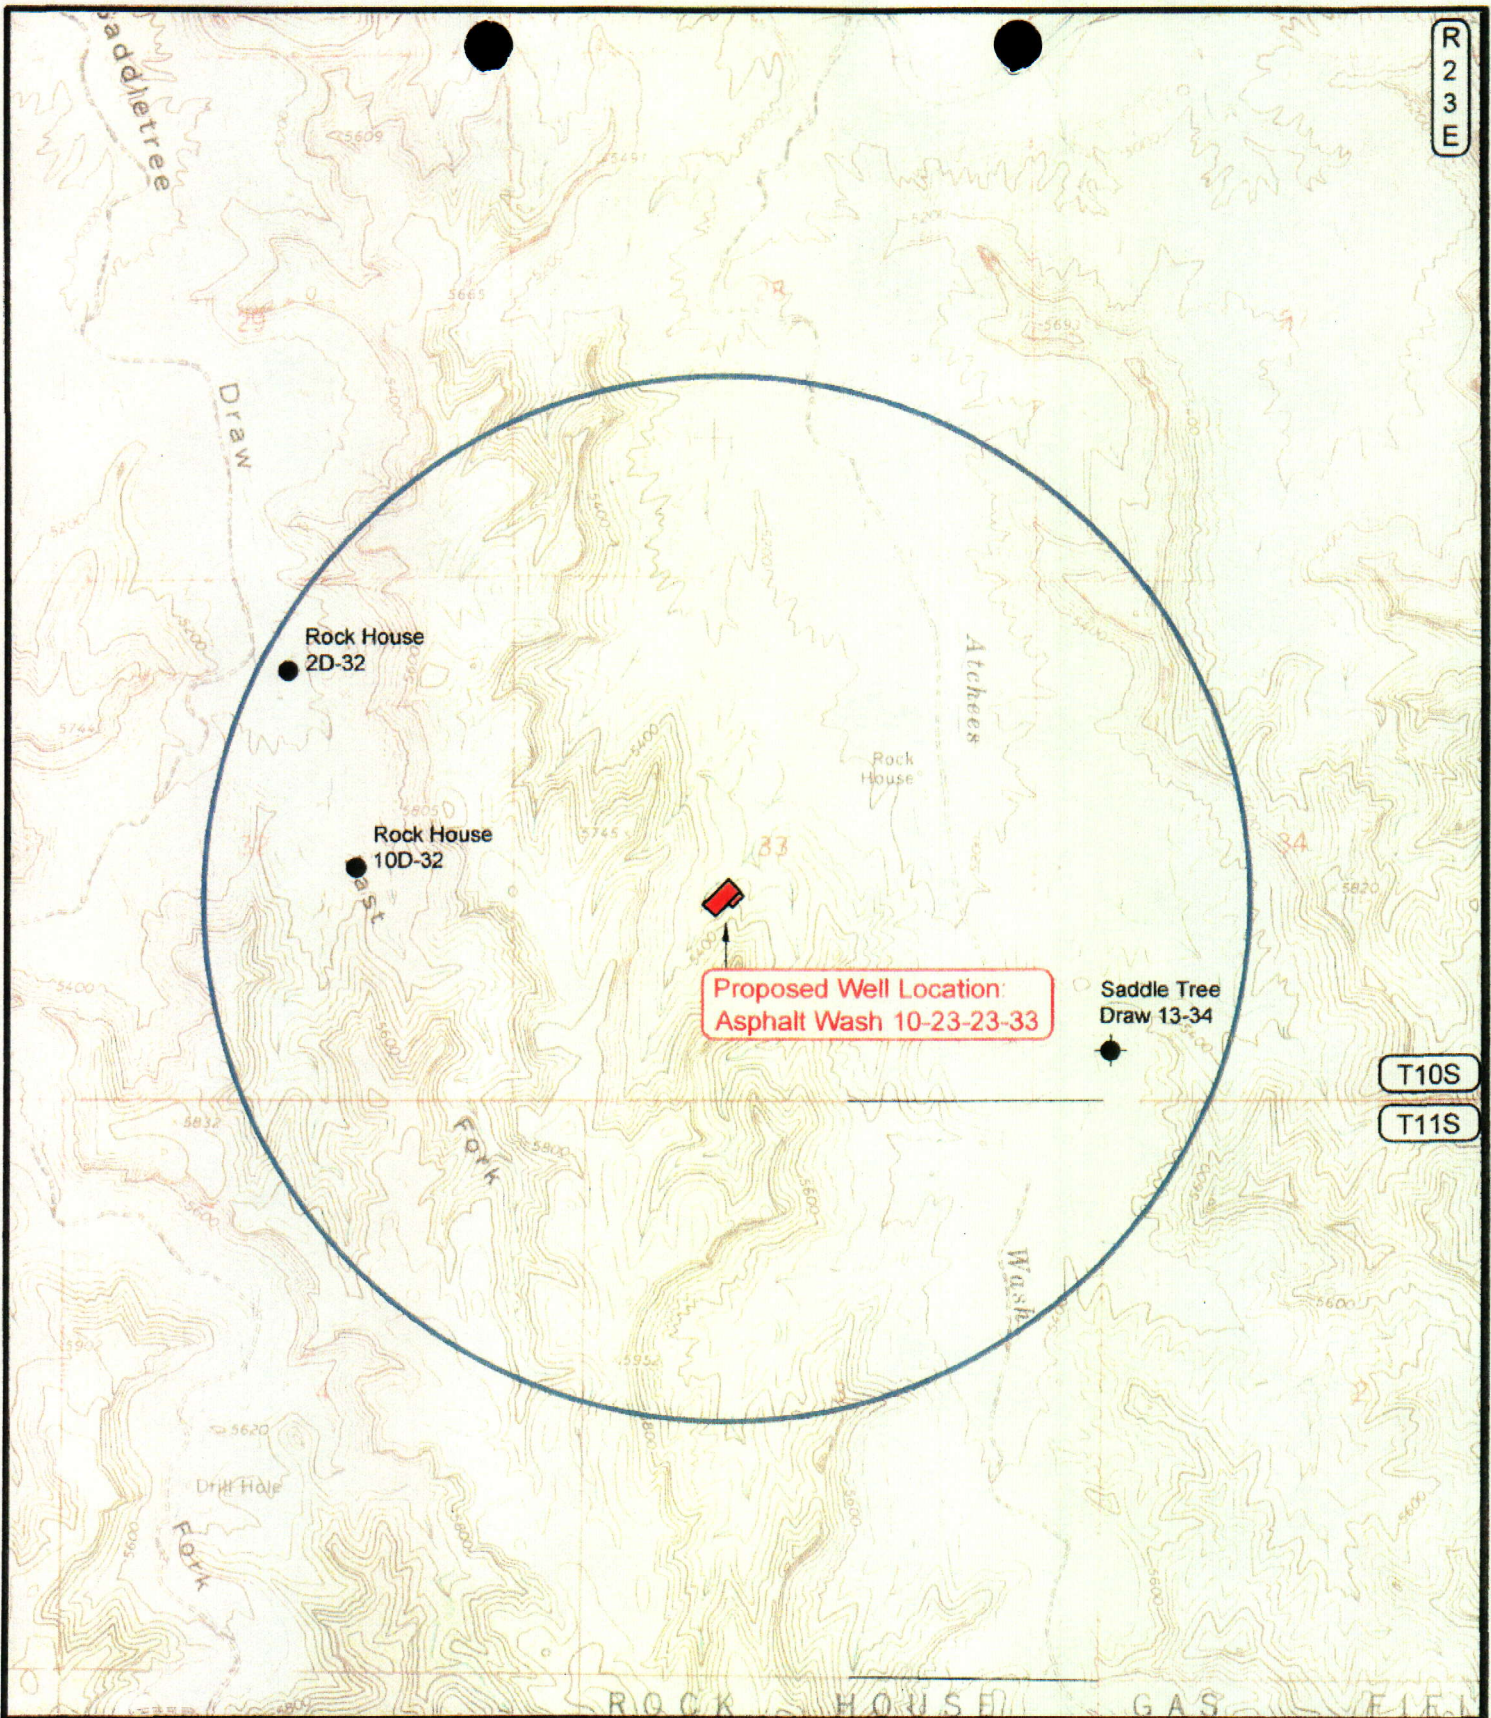

T10S

T11S

LEGEND

- | | |
|--------------------|--------------------------------|
| Ø = DISPOSAL WELL | Ø = WATER WELL |
| ● = PRODUCING WELL | ● = ABANDONED WELL |
| ● = SHUT IN WELL | ● = TEMPORARILY ABANDONED WELL |

TOPOGRAPHIC MAP "C"

DATE SURVEYED: 05-18-05

DATE DRAWN: 05-19-05

SCALE: 1" = 2000'

DRAWN BY: T.D.H.

REVISED:

ENDURING RESOURCES

Asphalt Wash 10-23-23-33
SECTION 33, T10S, R23E, S.L.B.&M.
1990' FSL & 2135' FWL

Timberline Land Surveying, Inc.

38 West 100 North Vernal, Utah 84078
 (435) 789-1365



SHEET

9

OF 10

3,000 PSI

BOP STACK

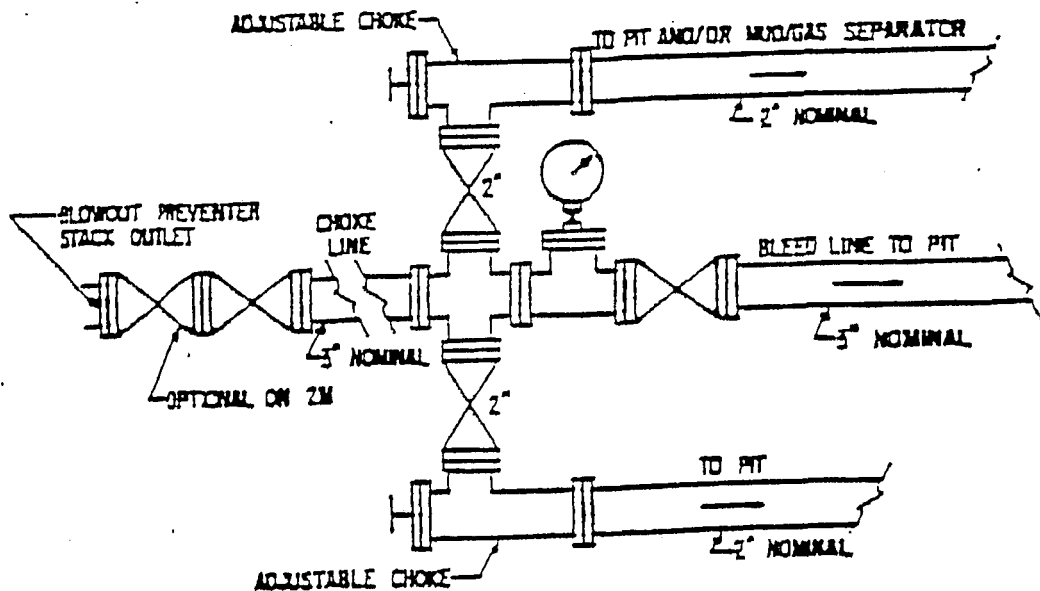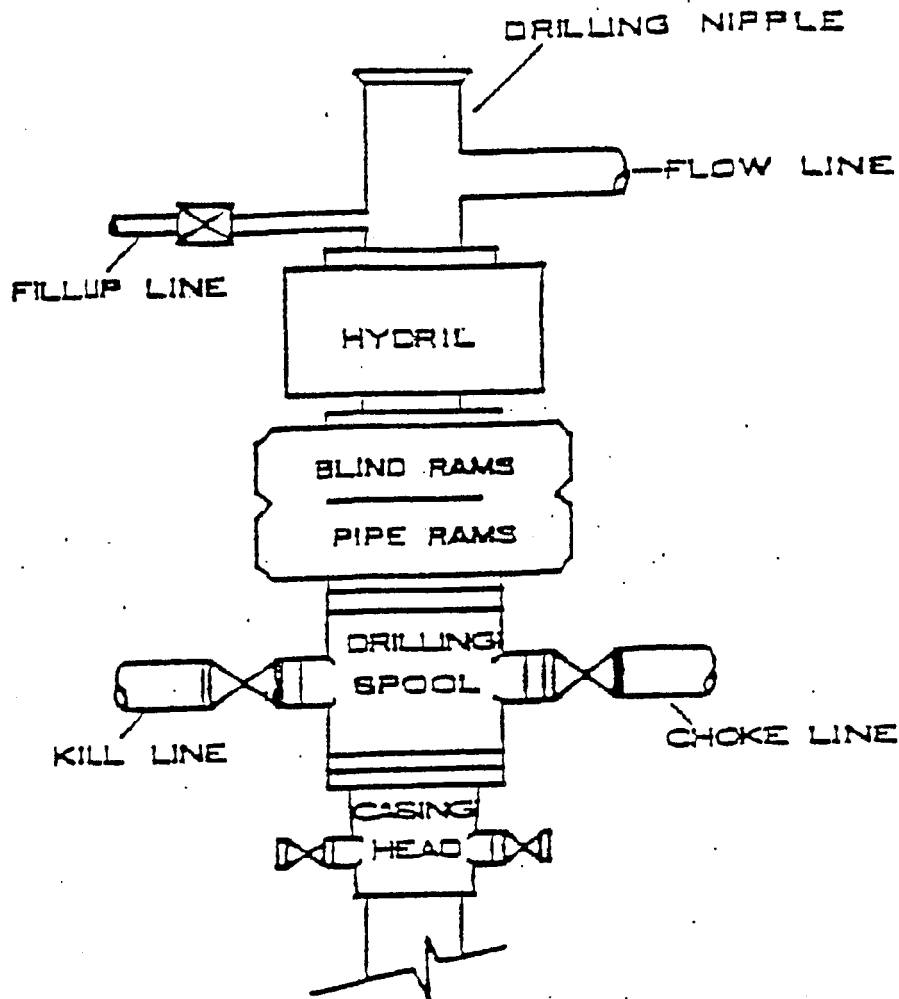

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 11/15/2005

API NO. ASSIGNED: 43-047-37378

WELL NAME: ASPHALT WASH 10-23-23-33

OPERATOR: ENDURING RESOURCES, LLC (N2750)

CONTACT: AL ARLIAN

PHONE NUMBER: 303-350-5114

PROPOSED LOCATION:

NESW 33 100S 230E

SURFACE: 1990 FSL 2135 FWL

BOTTOM: 1990 FSL 2135 FWL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-07351

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.90364

LONGITUDE: -109.3330

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. RLB0008031)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 43-8496)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

☐ R649-2-3.
Unit
☒ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
☐ R649-3-3. Exception
☐ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
☐ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

1- Federal Approval
2- Spacing SRP

CAUSE: 179-3

T10S R23E

NATURAL BUTTES FIELD

33

ROCKHOUSE
9-32-10-23
★

ASPAULT WASH
10-23-23-33
★

ATCHEE
WASH 33-9
★

SADDLE
TREE DRAW
13-34 X

T11S R23E

ROCK HOUSE FIELD

ROCK HOUSE FIELD

OPERATOR: ENDURING RES LLC (N2750)

SEC: 33 T. 10S R. 23E

FIELD: NATURAL BUTTES (630)

COUNTY: UTAH

SPACING: R649-3-2 / GENERAL SITING

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 15-NOVEMBER-2005



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

November 15, 2005

Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202

Re: Asphalt Wash 10-23-23-33 Well, 1990' FSL, 2135' FWL, NE SW, Sec. 33,
T. 10 South, R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37378.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Enduring Resources, LLC
Well Name & Number Asphalt Wash 10-23-23-33
API Number: 43-047-37378
Lease: UTU-07351

Location: NE SW Sec. 33 T. 10 South R. 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

CONFIDENTIAL

FORM 9

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU-07351

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

n/a

7. UNIT or CA AGREEMENT NAME:

n/a

8. WELL NAME and NUMBER:

Asphalt Wash 10-23-23-33

9. API NUMBER:

4304737378

10. FIELD AND POOL, OR WILDCAT:

Undesignated

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☒

OTHER _____

2. NAME OF OPERATOR:

Enduring Resources, LLC

3. ADDRESS OF OPERATOR:

475 17th Street, Suite 1500 CITY Denver

STATE CO ZIP 80202

PHONE NUMBER:

(303) 350-5719

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 1990' FSL - 2135' FWL

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESW 33 10S 23E S

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION



NOTICE OF INTENT
(Submit in Duplicate)

Approximate date work will start:



SUBSEQUENT REPORT
(Submit Original Form Only)

Date of work completion:



ACIDIZE



ALTER CASING



CASING REPAIR



CHANGE TO PREVIOUS PLANS



CHANGE TUBING



CHANGE WELL NAME



CHANGE WELL STATUS



COMMINGLE PRODUCING FORMATIONS



CONVERT WELL TYPE



DEEPEN



FRACTURE TREAT



NEW CONSTRUCTION



OPERATOR CHANGE



PLUG AND ABANDON



PLUG BACK



PRODUCTION (START/RESUME)



RECLAMATION OF WELL SITE



RECOMPLETE - DIFFERENT FORMATION



REPERFORATE CURRENT FORMATION



SIDETRACK TO REPAIR WELL



TEMPORARILY ABANDON



TUBING REPAIR



VENT OR FLARE



WATER DISPOSAL



WATER SHUT-OFF



OTHER: Request for APD
Extension

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 10/16/2007
TO: 10/16/2008

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10-15-07

By: [Signature]

10-16-07
RM

NAME (PLEASE PRINT) Alvin R. (Al) Arlian

TITLE Landman - Regulatory Specialist

SIGNATURE [Signature]

DATE 10/12/2007

(This space for State use only)

RECEIVED

OCT 15 2007

DIV OF OIL, GAS AND MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737378
Well Name: Asphalt Wash 10-23-23-33
Location: 1990' FSL - 2135' FWL, NESW, Sec 33, T10S-R23E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐



Signature

10/12/2007

Date

Title: Landman - Regulatory Specialist

Representing: Enduring Resources, LLC

RECEIVED
OCT 15 2007
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990' FSL - 2135' FWL		8. WELL NAME and NUMBER: Asphalt Wash 10-23-23-33
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESW 33 10S 23E S		9. API NUMBER: 4304737378
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Undesignated
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Request for APD Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 10/15/2008
TO: 10/15/2009

Approved by the
Utah Division of
Oil, Gas and Mining

COPY SENT TO OPERATOR

Date: 10-16-2008
Initials: KS

Date: 10-15-2008
By: [Signature]

NAME (PLEASE PRINT) Alvin R. (Al) Arlian	TITLE Landman
SIGNATURE [Signature]	DATE 9/29/2008

(This space for State use only)

RECEIVED

OCT 14 2008

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737378
Well Name: Asphalt Wash 10-23-23-33
Location: 1990' FSL - 2135' FWL, NESW, Sec 33, T10S-R23E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

9/29/2008

Date

Title: Administrative Assistant

Representing: Enduring Resources, LLC

RECEIVED

OCT 14 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: Enduring Resources, LLC		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202		8. WELL NAME and NUMBER: ASPHALT WASH 10-23-23-33
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990 FSL 2135 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 33 Township: 10.0S Range: 23.0E Meridian: S		9. API NUMBER: 43047373780000
PHONE NUMBER: 303 350-5114 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: Uintah		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 10/15/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____ </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Request an one-year extension of APD expiration date.		
Approved by the Utah Division of Oil, Gas and Mining Date: <u>October 15, 2009</u> By:		
NAME (PLEASE PRINT) Alvin Arlian		PHONE NUMBER 303 350-5114
SIGNATURE N/A		TITLE Landman-Regulatory
DATE 10/15/2009		

RECEIVED October 15, 2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047373780000

API: 43047373780000

Well Name: ASPHALT WASH 10-23-23-33

Location: 1990 FSL 2135 FWL QTR NESW SEC 33 TWP 100S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Alvin Arlian

Date: 10/15/2009

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC

Date: October 15, 2009

By: 

RECEIVED October 15, 2009

API Well No: 43047373780000

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: ASPHALT WASH 10-23-23-33
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 43047373780000
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990 FSL 2135 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 33 Township: 10.0S Range: 23.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/15/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Request for an one-year extension to APD expiration date.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 11/18/2010

By:

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A		DATE 11/10/2010

RECEIVED November 10, 2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047373780000

API: 43047373780000

Well Name: ASPHALT WASH 10-23-23-33

Location: 1990 FSL 2135 FWL QTR NESW SEC 33 TWP 100S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Alvin Arlian

Date: 11/10/2010

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC

Date: 11/18/2010

By: 

RECEIVED November 10, 2010

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9																														
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351																														
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:																														
		7. UNIT or CA AGREEMENT NAME:																														
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: ASPHALT WASH 10-23-23-33																														
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 43047373780000																														
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: NATURAL BUTTES																														
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990 FSL 2135 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 33 Township: 10.0S Range: 23.0E Meridian: S		COUNTY: UINTAH																														
		STATE: UTAH																														
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA																																
TYPE OF SUBMISSION <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/15/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	TYPE OF ACTION <table style="width: 100%; border: none;"> <tr> <td><input type="checkbox"/> ACIDIZE</td> <td><input type="checkbox"/> ALTER CASING</td> <td><input type="checkbox"/> CASING REPAIR</td> </tr> <tr> <td><input type="checkbox"/> CHANGE TO PREVIOUS PLANS</td> <td><input type="checkbox"/> CHANGE TUBING</td> <td><input type="checkbox"/> CHANGE WELL NAME</td> </tr> <tr> <td><input type="checkbox"/> CHANGE WELL STATUS</td> <td><input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS</td> <td><input type="checkbox"/> CONVERT WELL TYPE</td> </tr> <tr> <td><input type="checkbox"/> DEEPEN</td> <td><input type="checkbox"/> FRACTURE TREAT</td> <td><input type="checkbox"/> NEW CONSTRUCTION</td> </tr> <tr> <td><input type="checkbox"/> OPERATOR CHANGE</td> <td><input type="checkbox"/> PLUG AND ABANDON</td> <td><input type="checkbox"/> PLUG BACK</td> </tr> <tr> <td><input type="checkbox"/> PRODUCTION START OR RESUME</td> <td><input type="checkbox"/> RECLAMATION OF WELL SITE</td> <td><input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION</td> </tr> <tr> <td><input type="checkbox"/> REPERFORATE CURRENT FORMATION</td> <td><input type="checkbox"/> SIDETRACK TO REPAIR WELL</td> <td><input type="checkbox"/> TEMPORARY ABANDON</td> </tr> <tr> <td><input type="checkbox"/> TUBING REPAIR</td> <td><input type="checkbox"/> VENT OR FLARE</td> <td><input type="checkbox"/> WATER DISPOSAL</td> </tr> <tr> <td><input type="checkbox"/> WATER SHUTOFF</td> <td><input type="checkbox"/> SI TA STATUS EXTENSION</td> <td><input checked="" type="checkbox"/> APD EXTENSION</td> </tr> <tr> <td><input type="checkbox"/> WILDCAT WELL DETERMINATION</td> <td><input type="checkbox"/> OTHER</td> <td>OTHER: <input style="width: 100px;" type="text"/></td> </tr> </table>		<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR																														
<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME																														
<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE																														
<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION																														
<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK																														
<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION																														
<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON																														
<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL																														
<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION																														
<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>																														
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Request an one-year extension to APD expiration date.																																
Approved by the Utah Division of Oil, Gas and Mining Date: 11/23/2011 By:																																
NAME (PLEASE PRINT) Alvin Arlian		PHONE NUMBER 303 350-5114																														
SIGNATURE N/A		DATE 11/14/2011																														



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047373780000

API: 43047373780000

Well Name: ASPHALT WASH 10-23-23-33

Location: 1990 FSL 2135 FWL QTR NESW SEC 33 TWP 100S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Alvin Arlian

Date: 11/14/2011

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC

RECEIVED Nov. 14, 2011

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: Enduring Resources, LLC		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202		8. WELL NAME and NUMBER: ASPHALT WASH 10-23-23-33
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990 FSL 2135 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 33 Township: 10.0S Range: 23.0E Meridian: S		9. API NUMBER: 43047373780000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES		COUNTY: UINTAH
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/15/2012	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Request for an one-year extension to the APD expiration date.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: November 13, 2012

By:

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A	DATE 11/12/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047373780000

API: 43047373780000

Well Name: ASPHALT WASH 10-23-23-33

Location: 1990 FSL 2135 FWL QTR NESW SEC 33 TWP 100S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Alvin Arlian

Date: 11/12/2012

Title: Landman-Regulatory Representing: ENDURING RESOURCES, LLC

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: Enduring Resources, LLC		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202		8. WELL NAME and NUMBER: ASPHALT WASH 10-23-23-33
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1990 FSL 2135 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 33 Township: 10.0S Range: 23.0E Meridian: S		9. API NUMBER: 43047373780000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES		COUNTY: UINTAH
STATE: UTAH		
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/15/2013 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100%;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Request for an one-year extension to APD expiration date.		
Approved by the Utah Division of Oil, Gas and Mining Date: November 18, 2013 By:		
NAME (PLEASE PRINT) Alvin Arlian		PHONE NUMBER 303 350-5114
SIGNATURE N/A		TITLE Landman-Regulatory
DATE 11/11/2013		



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047373780000

API: 43047373780000

Well Name: ASPHALT WASH 10-23-23-33

Location: 1990 FSL 2135 FWL QTR NESW SEC 33 TWP 100S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Alvin Arlian

Date: 11/11/2013

Title: Landman-Regulatory Representing: ENDURING RESOURCES, LLC



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 14, 2014

Al Arlian
Enduring Resources, LLC
511-16th Street, Suite 700
Denver, CO 80202

43 047 37378
Asphalt Wash 10-23-23-33
33 105 23E

Re: APDs Rescinded for Enduring Resources, LLC, Uintah County


Dear Mr. Arlian:

Enclosed find the list of APDs that you asked to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

4304737262 E BENCH 11-22-43-17
4304737263 ASPHALT WASH 11-24-13-7
4304738722 SAND WASH 12-22-31-23
4304738721 BITTER CREEK 12-22-21-14
4304738738 BUCK CAMP CYN 11-22-21-27
4304738739 SAND WASH 12-22-32-23
4304738740 BITTER CREEK 12-22-21-24
4304738774 BUCK CYN 12-21-14-14
4304738775 BUCK CYN 12-21-14-23
4304736550 ROCK HOUSE 10-23-12-31
4304738777 E BENCH 11-22-31-33
4304738827 COTTONWOOD 12-21-31-9
4304738833 ARCHY BENCH 11-22-23-1
4304738836 WILLOW CREEK 12-21-41-20
4304738837 BUCK CAMP 11-22-32-26
→ 4304737378 ASPHALT WASH 10-23-23-33
4304738858 ROCK HOUSE 10-23-14-29
4304738859 BUCK CAMP 11-22-22-26
4304738860 BUCK CAMP 11-22-12-26
4304738871 BUCK CAMP CYN 11-22-31-21
4304738876 BUCK CAMP 11-22-21-26
4304736107 SOUTHMAN CYN 10-24-21-5
4304736108 SOUTHMAN CYN 10-24-22-6
4304736109 SOUTHMAN CYN 10-24-42-6

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such purposes.

CONFIDENTIAL

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-07351
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
PHONE NUMBER: (303) 350-5719		8. WELL NAME and NUMBER: Asphalt Wash 10-23-23-33
10. FIELD AND POOL, OR WILDCAT: Undesignated		

4. LOCATION OF WELL	
FOOTAGES AT SURFACE: 1990' FSL - 2135' FWL	COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESW 33 10S 23E S	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 10/4/2006	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Request for APD Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 11/15/2006
TO: 11/15/2007

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10-16-06
By: [Signature]
COPY SENT TO OPERATOR
Date: 10-18-06
Initials: [Signature]

NAME (PLEASE PRINT) Evette Bissett	TITLE Regulatory Compliance Assistant
SIGNATURE [Signature]	DATE 10/4/2006

(This space for State use only)

RECEIVED
OCT 10 2006



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737378
Well Name: Asphalt Wash 10-23-23-33
Location: 1990' FSL - 2135' FWL, NESW, Sec 33, T10S-R23E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 11/15/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

10/4/2006
Date

Title: Regulatory Compliance Assistant

Representing: Enduring Resources, LLC

RECEIVED

OCT 10 2006

DIV OF OIL, GAS & MINING